

1 2 3 4 5 6

SPECIFICATIONS:

ENCLOSURE: DIECAST ALUMINUM
 COLOUR: BEIGE (POWDER COATED)
 WEIGHT: <1.36kg (3.0 lbs)
 TEMPERATURE STORAGE: -55° C TO +85° C
 TEMPERATURE OPERATING: -40° C TO +70° C
 RELATIVE HUMIDITY: 0-100% CONDENSING
 ALTITUDE: 6,096m (20,000 ft)
 FREQUENCY: 800MHz TO 1800MHz
 TERMINATION: 50Ω

INPUTS:
 TNC GPS FROM ANTENNA - DESIGNED FOR
 FOR ANTENNA GAIN OF 34dB +6/-3 dB.




2 PIN 12-24V AC OR DC


OUTPUTS:

ST TYPE FIBER OPTIC CONNECTOR FOR SIMPLEX MULTIMODE
 50/125 MICRON CABLE

TO BE USED IN RVL KIT 516061 (INCLUDES POWER CABLE).

NOTES: SYSTEM ALLOWS FIBER RUNS OF UP TO 1524 METERS
 (5000 FEET) OF 50/125 FIBER OPTIC CABLE.

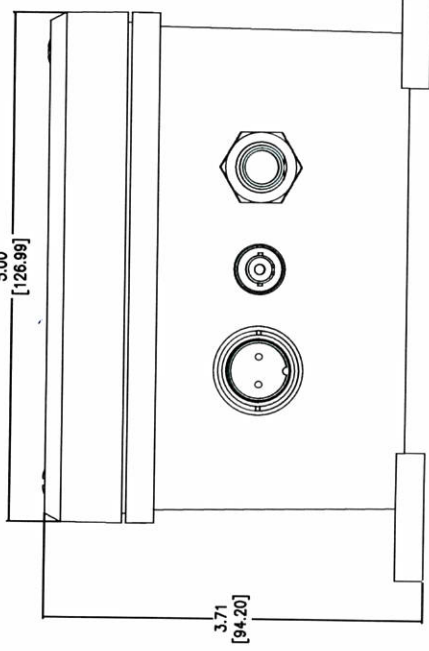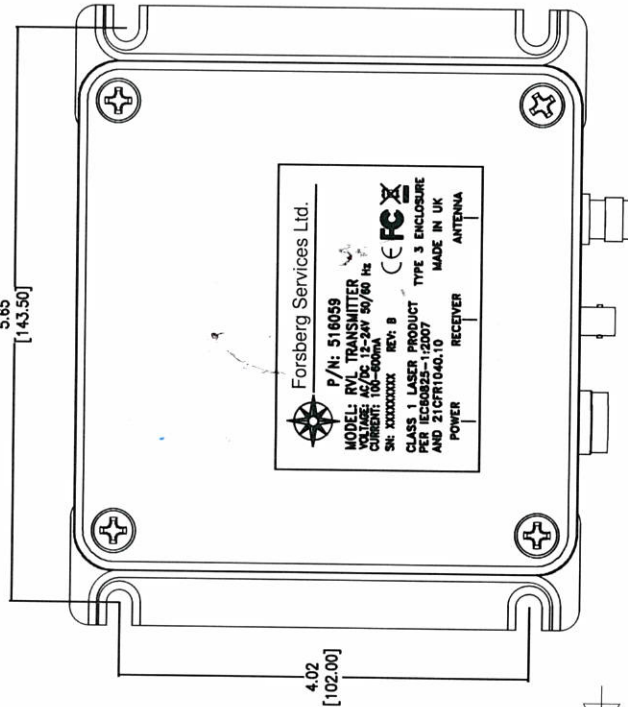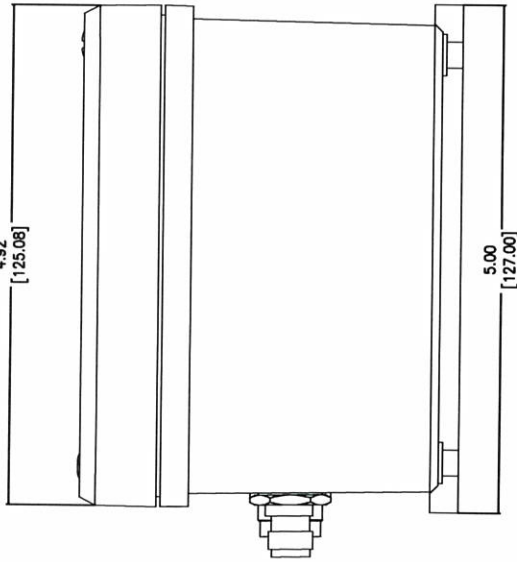

Part Descriptor: RVL TRANSMITTER		Part No: 516059	Issue: B	H/W Version: -
Author: <i>LS</i>	Checked: <i>RV</i>	Approved: <i>SM</i>	Date: 06-05-15	Unless Otherwise Specified: Dimensions are in Inches Surface Finish: N/A Linear Tolerance: N/A Angular Tolerance: N/A Debur and break sharp edges
Forsberg Services Ltd. Richmond House White Cross Lancaster LA1 4XF U.K.			Material: Various	
			Scale: NTS	Drawing No: A500-08-200
			Drawing Version: V1.00	A4 Sheet: 1 of 1

1 2 3 4 5 6