




# Crescent P206 and P207 GNSS Boards

## Multi-Constellation Performance on a Single-Frequency Platform

### key features

- **Extremely affordable single frequency, multi-constellation solution with up to 20 Hz update rate**
- **Uses GPS, GLONASS and BeiDou; Galileo and QZSS ready**
- **Fast start-up and reacquisition times allow you to get right to work**
- **High-precision, differential positioning accuracy of 60 cm, 95% of the time**
- **Exclusive e-Dif option where other differential signals are not practical**
- **COAST and SureTrack maintain sub-meter DGNSS positioning for 40 minutes after correction loss**
- **Small form and low-power consumption design is ideal for easy integration**

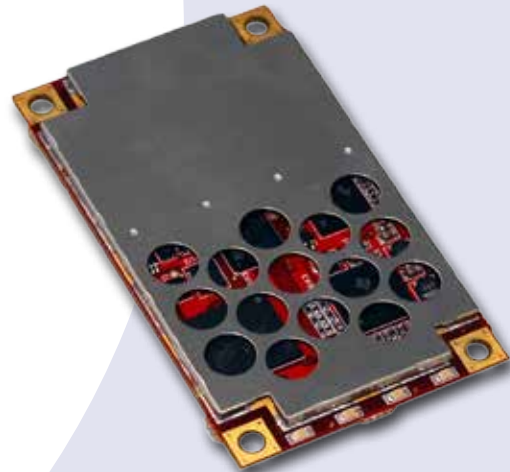

Hemisphere GNSS' new Crescent™ P206™ and P207™ OEM modules use GPS, GLONASS, and BeiDou, and are Galileo and QZSS ready. Track more signals for unparalleled positioning performance even in challenging environments. Leverage the compact size and easy integration in your design. The 34-pin P206 module is a drop-in upgrade for many Hemisphere products. P207 is a drop in upgrade for existing Crescent designs using standard 20 pin modules from other manufacturers.

DGPS and SBAS with patented COAST™ software enables Hemisphere receivers to utilize previous DGPS and SBAS correction data during times of interference, signal blockage and weak signal. The receiver will coast and continue to maintain sub-meter positioning for up to 40 minutes without any DGPS signal. When your corrections are only for one GNSS constellation, for example GPS using SBAS, Hemisphere's patented SureTrack™ goes to work to model all other satellites, helping maintain an accurate solution in challenging environments.



precision@hemispheregnss.com  
www.hemispheregnss.com

# Crescent P206 and P207 GNSS Boards

## GPS Sensor Specifications

Receiver Type:	GNSS single-frequency RTK with carrier phase	
Signals Received:	GPS, GLONASS, BeiDou, GALILEO <sup>1</sup> and QZSS <sup>1</sup>	
Channels:	372	
GPS Sensitivity:	-142 dBm	
SBAS Tracking:	3-channel, parallel tracking	
Update Rate:	1 Hz standard, 10 or 20 Hz optional	
Accuracy:	Horizontal (RMS)	Vertical (RMS)
RTK: <sup>2</sup>	10 mm + 1 ppm	20 mm + 2 ppm
SBAS (WAAS): <sup>3</sup>	0.3 m	0.6 m
Autonomous, no SA: <sup>3</sup>	1.2 m	2.5 m
Timing (1PPS) Accuracy:	20 ns	
Cold Start: <sup>4</sup>	< 60 s typical (all unknown)	
Warm Start:	< 30 s typical (no ephemeris)	
Hot Start:	< 10 s typical (all known)	
HeadStart: <sup>5</sup>	Removeable, auto-recharging onboard clock battery	
Maximum Speed:	1,850 kph (999 kts)	
Maximum Altitude:	18,288 m (60,000 ft)	

## Communications

Serial Ports:	4 full-duplex 3.3 V CMOS (3 main serial ports, 1 differential-only port), 1 USB Host <sup>6</sup> , 1 USB Device
Baud Rates:	4800 - 115200
Correction I/O Protocol:	Hemisphere GNSS proprietary, ROX Format, RTCM v2.3, RTCM v3.2, CMR, CMR+
Data I/O Protocol:	NMEA 0183, Crescent binary <sup>7</sup>
Timing Output:	1PPS, CMOS, active high, rising edge sync, 10 kΩ, 10 pF load
Event Marker Input:	CMOS, active low, falling edge sync, 10 kΩ, 10 pF load

## Power

Input Voltage:	3.3 VDC +/- 3%
Power Consumption:	1.2 W nominal L1 GPS 1.4 W nominal single frequency GPS + GLONASS + BeiDou
Current Consumption:	370 mA nominal L1 GPS 420 mA nominal single frequency GPS + GLONASS + BeiDou
Antenna Voltage:	15 VDC maximum Antenna Short Circuit
Protection:	Yes
Antenna Gain Input Range:	10 to 40 dB
Antenna Input Impedance:	50 Ω

## Power

Input Voltage:	3.3 VDC +/- 5%
Power Consumption:	< 3.2 W at 3.3 V (L1/L2 GPS/GLONASS/BeiDou) < 3.9W at 3.3V (L1/L2 GPS/GLONASS/BeiDou; L-Band)
Current Consumption:	< 970 mA at 3.3 V (L1/L2 GPS/GLONASS/BeiDou) < 1180 mA at 3.3V (L1/L2 GPS/GLONASS/BeiDou; L-Band)
Antenna Voltage:	15 VDC maximum
Antenna Short Circuit Protection:	Yes
Antenna Gain Input Range:	10 to 40 dB
Antenna Input Impedance:	50 Ω

## Environmental

Operating Temperature:	-40°C to +85°C (-40°F to +185°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing (when installed in an enclosure)

## Mechanical

Dimensions:	15.2 L x 7.1 W x 1.6 H (cm) 6.0 L x 2.8 W x 0.63 H (in)
Weight:	.105 kg (3.70 oz.)
Status Indication (LED):	Power, Primary and Secondary GPS lock, Differential lock, DGPS position, Heading, RTK lock, Atlas L-band lock
Power/Data Connector:	34-pin male header 0.05" pitch
P206:	20-pin male header 0.05" pitch
P207:	20-pin male header 0.05" pitch
Antenna Connectors:	MCX, female, straight

## Aiding Devices

Gyro:	Provides smooth heading, fast heading reacquisition and reliable < 0.5° per min heading for periods up to 3 min. when loss of GNSS has occurred
Tilt Sensors:	Provide pitch and roll data, and assist in fast start-up and reacquisition of heading solution

<sup>1</sup> Firmware update required

<sup>2</sup> Depends on multipath environment, number of satellites in view, satellite geometry baseline length (up to 10 km) and ionospheric activity

<sup>3</sup> Depends on multipath environment, number of satellites in view, satellite geometry and ionospheric activity

<sup>4</sup> Cold start means no approx. position, no approx. time, no almanac, no ephemeris

Warm starts require an approx. position, approx. time, and almanac

Hot starts require an approx. position, approx. time, and valid ephemeris

<sup>5</sup> Maintains time while receiver is powered off, reducing cold start occurrences

<sup>6</sup> P206 Only

<sup>7</sup> Hemisphere GNSS proprietary

Authorized Distributor:

**NavtechGPS**

+1-703-256-8900 or 800-628-0885  
info@NavtechGPS.com  
www.NavtechGPS.com

**Hemisphere**

Hemisphere GNSS, Inc.  
8515 E. Anderson Drive  
Scottsdale, AZ, USA 85255

Toll-Free: +1-855-203-1770  
Phone: +1-480-348-6380  
Fax: +1-480-270-5070  
precision@hgns.com  
www.hgns.com