



**GPS**  
NETWORKING

# L1RRKPAS

## L1 GPS Passive Antenna

### Technical Product Data


Contact us for product details and pricing

**NavtechGPS**

+1-703-256-8900 or 800-628-0885

info@NavtechGPS.com

www.NavtechGPS.com

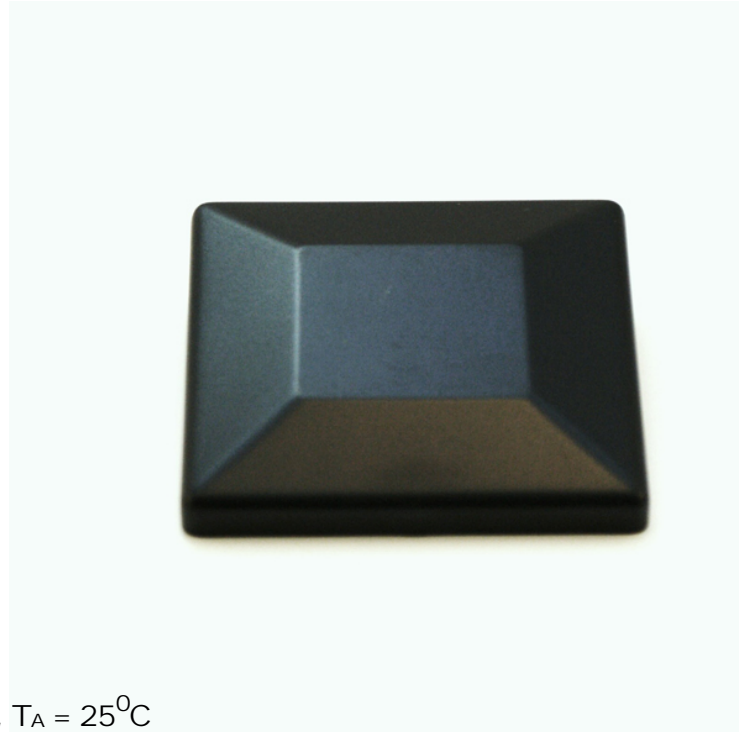

Electrical Specifications,  $T_A = 25^{\circ}\text{C}$

Parameter	Conditions		Max	Units
Center Frequency		1575.42 +/-3		MHz
Impedance		50		$\Omega$
Polarization	Right-hand circularly polarized,			
Axial Ration			3	dB
VSWR		1.5:1		-
Power Handling			1	Watt
Peak Gain		4		dBic
Gain Coverage	$\geq -4\text{dBic}$ at $-90^{\circ} \leq \theta \leq 90^{\circ}$ (over 75% volume)			

<b>Mechanical:</b>	
Weight	48g max.
Size	66 x 66 x 18 mm
Connector	SMA female
<b>Environmental:</b>	
Working Temperature	$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$
Storage Temperature	$-50^{\circ}\text{C} < T < +95^{\circ}\text{C}$
Vibration	Sine Sweep,1G(0-P),10-150-10Hz each axis
Humidity	95%~100% RH



Contact NavtechGPS for product details. [www.NavtechGPS.com](http://www.NavtechGPS.com)

+1-703-256-8900 • 800-628-0885 • [info@navtechgps.com](mailto:info@navtechgps.com)