


Receivers OEM628™



NEXT GENERATION HIGH PERFORMANCE GNSS RECEIVER

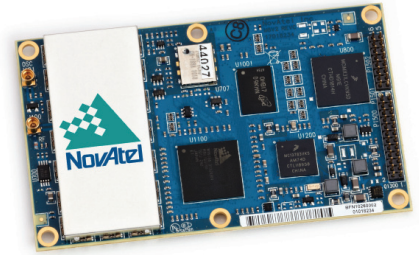

DESIGNED WITH THE FUTURE IN MIND

The OEM628 tracks all current and upcoming Global Navigation Satellite System (GNSS) constellations and satellite signals including GPS, GLONASS, Galileo, BeiDou and QZSS. It features configurable channels to optimize satellite availability in any condition, no matter how challenging. The OEM628 is software upgradable to track future signals as they become available. Maximizing satellite availability and optimizing GNSS signal usage now, and in the future, ensures consistent, high performance GNSS positioning.

EASY SYSTEM INTEGRATION

The OEM628 is designed and built with a focus on product quality and ease of integration. It maintains our industry setting OEMV-2 form factor, ensuring easy drop-in replacement, and provides a backward compatible command and log interface for existing customers. An integrator's development kit and user friendly configuration software are available to assist new customers with integration, enabling faster time to market. NovAtel's well established, comprehensive set of software commands also facilitates system integration. Ethernet and NTRIP 2.0 Client and Server connectivity is offered in addition to our traditional communications interfaces.

FLEXIBLE CONFIGURATIONS FOR YOUR APPLICATION

Proven, innovative NovAtel technology combines to achieve the best in GNSS positioning. NovAtel's industry leading Pulse Aperture Correlator (PAC) multipath mitigation technology is standard and ensures the highest quality measurements and positioning. The OEM628 provides excellent resistance to interference for consistent, accurate and reliable positioning. Configurable options ensure your positioning and accuracy needs are always met. To learn more about how our firmware options can enhance your positioning, please visit www.novatel.com/products/firmware-options.

BENEFITS

- + Innovative OEM6® technology
- + Supports current and future GNSS signals
- + Application based configurations
- + Designed for rapid integration

FEATURES

- + Low power consumption
- + Flexible communication interfaces
- + Software configurable performance
- + High position accuracy and availability
- + SPAN® INS functionality

If you require more information about our receivers, visit www.novatel.com/products/gnss-receivers/oem-receiver-boards



Contact NavtechGPS for product details. www.NavtechGPS.com
+1-703-256-8900 • 800-628-0885 • info@navtechgps.com

OEM628™

PERFORMANCE¹

Channel Configuration

120 Channels²

Signal Tracking

GPS L1, L2, L2C, L5
GLONASS L1, L2, L2C
BeiDou³ B1, B2
Galileo E1, E5a, E5b, AltBOC
SBAS
QZSS
L-Band

Horizontal Position Accuracy (RMS)

| | |
|-------------------------------|--------------|
| Single point L1 | 1.5 m |
| Single point L1/L2 | 1.2 m |
| SBAS ⁴ | 0.6 m |
| DGPS | 0.4 m |
| NovAtel CORRECT™ | |
| » TERRASTAR-D ⁵ | 6 cm |
| » Veripos Apex ^{2 6} | 6 cm |
| » RT-2® | 1 cm + 1 ppm |
| Initialization time | <10 s |
| Initialization reliability | > 99.9% |

Measurement Precision (RMS)

Fully independent code and carrier measurements:

| | GPS | GLO |
|--------------------------------|--------|--------|
| L1 C/A code | 4 cm | 8 cm |
| L1 carrier phase | 0.5 mm | 1.0 mm |
| L2 P(Y) code ⁷ | 8 cm | 8 cm |
| L2 carrier phase ⁷ | 1.0 mm | 1.0 mm |
| L2C code ⁸ | 8 cm | 8 cm |
| L2C carrier phase ⁸ | 1.0 mm | 1.0 mm |
| L5 code | 3 cm | – |
| L5 carrier phase | 0.5 mm | – |

Maximum Data Rate⁹

| | |
|--------------|--------|
| Measurements | 100 Hz |
| Position | 100 Hz |

Time to First Fix

| | |
|--------------------------|-------|
| Cold start ¹⁰ | <50 s |
| Hot start ¹¹ | <35 s |

Signal Reacquisition

| | |
|----|------------------|
| L1 | <0.5 s (typical) |
| L2 | <1.0 s (typical) |

Time Accuracy¹² 20 ns RMS

Velocity Accuracy

0.03 m/s RMS

Velocity Limit¹³ 515 m/s

PHYSICAL AND ELECTRICAL

Dimensions 60 x 100 x 9 mm

Weight 37 g

Power

Input voltage¹⁴ +3.3 VDC ±5%
Power consumption¹⁵ 1.3 W

Antenna LNA Power Output

Output voltage 5 VDC ±5%
Maximum current 100 mA

Connectors

Main 24-pin dual row male header
Aux 16-pin dual row male header
Antenna input MMCX female
External oscillator input MMCX female

COMMUNICATION PORTS

1 RS-232/RS-422 up to 921,600 bps
2 LVTTTL up to 921,600 bps
2 CAN Bus¹⁶ 1 Mbps
1 USB port 12 Mbps
1 LAN Ethernet port supporting:
» 10 BaseT/100BaseT networks
» Direct TCP/IP & UDP connectivity
» NTRIP (v2.0) client and server
Pulse Per Second (PPS) output
Event marker input support

ENVIRONMENTAL

Temperature

Operating -40°C to +85°C
Storage -40°C to +85°C

Humidity 95% non-condensing

Vibration

Random MIL-STD 810G (Cat 24, 7.7 g RMS)
Sinusoidal IEC 60068-2-6

Acceleration (operating)

MIL-STD 810G, Method 513.6 Procedure II (16 g)

Bump ISO 9022-31-06 (25 g)

Shock MIL-STD-810G (40 g Survival (1000 g)

FEATURES

- Field upgradeable software
- 20 Hz measurement and position data rate
- PAC multi-path mitigating technology
- Differential GPS positioning
- Differential correction support for RTCM 2.1, 2.3, 3.0, 3.1, CMR, CMR+ and RTCA
- Navigation output support for NMEA 0183 and detailed NovAtel ASCII and binary logs
- Auxiliary strobe signals, including a configurable 1 PPS output for time synchronization and mark inputs
- Outputs to drive external LEDs
- External oscillator input

NOVATEL CONNECT™

NovAtel Connect is an intuitive configuration and visualization tool suite allowing comprehensive control of the OEM628 product.

- Easy to use wizards for positioning mode configuration and raw data collection
- Detailed GUI for comprehensive status information
- Plan view and playback files allow monitoring the positioning and configuration history
- Remotely control and monitor the OEM628 over the internet
- Windows XP and Windows 7 platforms

FIRMWARE OPTIONS

- ALIGN®
- GLIDE™
- RAIM
- 100 Hz output rate⁹
- RT-2
- SPAN

OPTIONAL ACCESSORIES

- GPS-700 series antennas
- ANT series antennas
- RF cables-5, 10 and 30 m lengths
- OEM6 Development Kit

HIGH VIBRATION HARDWARE

The OEM628 is available as a High Vibration TCXO hardware variant, the OEM628V. This is compliant with MIL-STD 810G (category 24, 20 g RMS).

For the most recent details of this product: www.novatel.com/products/gnss-receivers/oem-receiver-boards/oem6-receivers/oem628/

novatel.com

sales@novatel.com

1-800-NOVATEL (U.S. and Canada) or 403-295-4900

China
0086-21-54452990-8011

Europe 44-1993-848-736

SE Asia and Australia
61-400-883-601

Version 10 Specifications subject to change without notice.

©2014 NovAtel Inc. All rights reserved.

NovAtel, RT-2, OEM6, SPAN and ALIGN are registered trademarks of NovAtel Inc.

GLIDE, OEM628, NovAtel CORRECT and NovAtel Connect are trademarks of NovAtel Inc.

D15588 May 2014

Printed in Canada.



1. Typical values. Performance specifications subject to GPS system characteristics, US DOD operational degradation, ionospheric and tropospheric conditions, satellite geometry, baseline length, multipath effects and the presence of intentional or unintentional interference sources.

2. Tracks up to 60 L1/L2 satellites.

3. Designed for BeiDou Phase 2 and 3, B1 and B2 compatibility.

4. GPS only.

5. TERRASTAR-D subscriptions are available from NovAtel.

6. Veripos Apex² marine subscriptions are available directly from Veripos.

(www.veripos.com)

7. L2 P for GLONASS.

8. L2 C/A for GLONASS.

9. 100 Hz while tracking up to 20 satellites.

10. Typical value. No almanac or ephemerides and no approximate position or time.

11. Typical value. Almanac and recent ephemerides saved and approximate position and time entered.

12. Time accuracy does not include biases due to RF or antenna delay.

13. Export licensing restricts operation to a maximum of 515 metres per second.

14. Consult the OEM6 Family Installation & Operation user manual for power supply considerations.

15. Power consumption values for GPS L1/L2 with Ethernet disabled.

16. User application software required.

