




## VeraPhase® 6200 Antenna High Precision Dual Band GNSS Antenna

The patented VeraPhase® technology rivals, and in some aspects, surpasses the performance of choke ring technology but is lighter, smaller, and more economical.

The VP6200 antenna is capable of receiving GPS L1/L2, GLONASS G1/G2, BeiDou B1/B2, Galileo E1, and L-band (1195 – 1254MHz plus 1525-1610MHz). It has consistent performance (gain, axial ratio, PCV, and PCO) across the full bandwidth of the antenna. It provides the lowest axial ratios (horizon to horizon, over all azimuths) across all GNSS frequencies (<0.5dB at zenith, <2 dB typ. at horizon). It has an exceptional front to back ratios, high efficiency (>70%), a tight PCV, and near constant PCO for all azimuth and elevation angles, over all in-band frequencies.

The VP6200 provides high receive gain over the full GNSS spectrum: It has a robust pre-filtered LNA, with high IP3 to minimize de-sensing from high-level out-of-band signals, including 700MHz LTE, while still providing a noise figure of less than 2.5dB.

An uncommitted PCB is available within the base of the antenna for integration of a custom system board such as a PPP or RTK GNSS receiver or other applications.

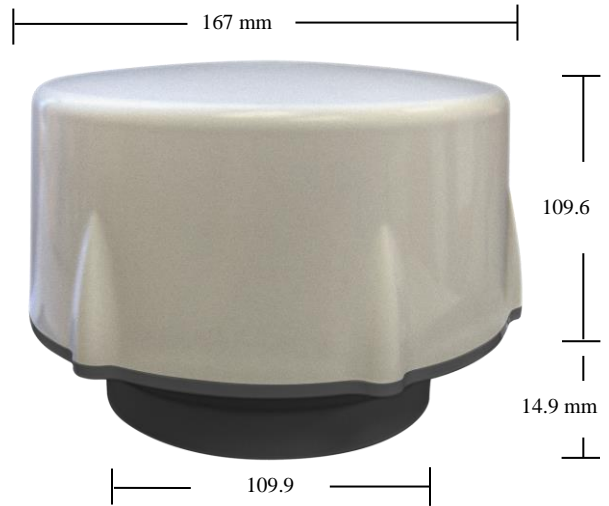

VeraPhase 6200 Dimensions (mm)  
Conical Radome also available

### Applications

- Survey
- High Precision GNSS systems
- Custom OEM Products
- RTK / PPP systems

### Features

- Low axial ratio from horizon to horizon
- Very Tight Phase Center Variation (<1.5mm)
- Invariant performance from: +2.7 to 24 VDC
- Space in housing for integrated PPP, RTK receiver or other OEM system.

### Benefits

- Consistent performance across all frequencies
- Broadest tracking elevation (0° - 180°)
- Extreme precision
- Excellent multipath rejection
- IP67, REACH, and RoHS compliant
- Reduced time to market



## VeraPhase® 6200 – High Precision Dual Band GNSS Antenna

### Specifications (Measured @ Vcc = 3V, and Temperature=25°C)

#### Antenna

Antenna Gain	5 dBic to 7 dBic (all Frequency Bands)
Efficiency	>70%
Axial Ratio, over full bandwidth	< 0.5 dB at zenith (refer to table below for other elevations)
Phase Centre Variation	± 1.5 mm across all frequencies
Phase Centre Offset (RMS)	± 0.2 mm across all frequencies

#### Electrical

Available LNA Configurations	35 dB or 15dB OEM
Gain Variation with Temperature.	3dB max over operational temperature range
LNA Gain Flatness	1.5 dB over frequency range (typ)
P1dB Output	+12 dBm
Bandwidth	1195 – 1254 MHz plus 1525 – 1610 MHz
LNA Noise Figure	2.5dB typ. at 25°C
VSWR (at LNA output)	<1.5:1 max.
Supply Voltage Range	+2.7 to 24VDC nominal
Supply Current	<35mA
Out of Band Rejection (min)	<1030MHz    55dB <1100MHz    40dB 1400MHz      40dB >1700MHz    40dB >1750MHz    50dB
Group Delay variation	<5 ns

#### Mechanicals & Environmental

Mechanical Size	See drawing on page 1
Antenna Reference Plane (ARP)	Bottom of 5/8" thread
North Orientation Indicator	Mark on radome above connector
Operating Temperature Range	-40°C to +85°C
Weight	<800g (flat radome), 820g (conical radome)
Mounting Thread	5/8"x 11 TPI female
Environmental	IP67, RoHS and REACH compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	MIL STD 810D,



+1-703-256-8900 or 800-628-0885  
 info@NavtechGPS.com  
 www.NavtechGPS.com

When precision matters...™

Axial ratio (dB) (typical) - Flat Radome							
Elevation	L5 - E5a	E5b - B2 - G3	L2 - G2	B3	E6	L1 - E1 - B1	G1
90°	0.5	0.3	0.2	0.3	0.3	0.3	0.4
30°	1.5	1.5	1.3	1	1.5	1.2	1.2
10°	2	1.8	1.4	1.8	2.2	2	2.2
Axial ratio (dB) (typical) - Conical Radome							
Elevation	L5 - E5a	E5b - B2 - G3	L2 - G2	B3	E6	L1 - E1 - B1	G1
90°	0.5	0.4	0.2	0.3	0.3	0.3	0.4
30°	1.8	1.7	1.3	1.2	1.5	1.5	1.5
10°	2.2	1.8	1.5	2	2.5	2.5	2.8

**Ordering Information:**

VeraPhase 6200 with 35 dB LNA, flat white radome  
 VeraPhase 6200 with 35dB LNA, conical white radome

33-623500-xx-00-11  
 33-623500-xx-00-01

Where xx = 01 for TNC or 14 for N-Type



An ISO 9001:2015  
 Certified Company

36 Steacie Drive, Ottawa ON K2K 2A9 Canada  
 Fax 613 591 3121

Tel +1 613 591 3131  
[sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind.  
 © 2015 Tallysman Wireless Inc. All rights reserved. Rev 1.5



Contact NavtechGPS for product details. [www.NavtechGPS.com](http://www.NavtechGPS.com)  
 +1-703-256-8900 • 800-628-0885 • [info@navtechgps.com](mailto:info@navtechgps.com)