



## Revolutionary GNSS Wideband Antenna Enhances Accuracy and Performance

### Benefits

High precision measurements

More signal observations ensure higher performance

Eliminates need to upgrade as future GNSS signals become available

Withstands harsh environments

### Features

Stable phase centre

Ultra-wideband Dorne-Margolin element

Aluminum alloy construction

Tracks signals when visible, down to the horizon and below

### Supports GPS, GLONASS, Galileo and Compass

NovAtel's multi-constellation GNSS-750 antenna delivers next generation choke ring technology, ensuring functionality with existing and planned satellite constellations. Its robust, low profile construction makes it ideal for reference stations, geological monitoring and other applications requiring a robust high performance antenna.

### Superior Performance and Accuracy

The innovative design of this 3D antenna improves low-elevation tracking. An insert has been added to the choke ring design to enhance multipath rejection based on results from live GIOVE-A, GIOVE-B and L5 signals.

### Proven Robust Technology

Utilizing an ultra-wideband Dorne-Margolin antenna element, the GNSS-750 optimizes antenna gain, enabling use with most manufacturers' geodetic receivers. Its sturdy aluminum alloy construction ensures it can withstand the most difficult environmental conditions.

For more information contact

**NavtechGPS**

Your ONE Source for GNSS Products and Solutions

+1-703-256-8900 or 800-628-0885

info@NavtechGPS.com

www.NavtechGPS.com

## Performance

### Signals Tracked

GPS	L1, L2, L2C, L5
GLONASS	L1, L2, L3
Galileo	E1, E5a, E5b, E6, AltBOC
Compass	B1, B2, B3
L-band	(including OmniSTAR and CDGPS)

### 3 dB Pass Band

L1	1568.5±55 MHz (typical)
L2	1232±80 MHz (typical)

### Out-of-Band Rejection

L1 ( $f_c=1568.5$ MHz)	
$f_c \pm 100$ MHz	30 dBc (typical)
$f_c \pm 150$ MHz	50 dBc (typical)
L2 ( $f_c=1232.5$ MHz)	
$f_c + 150$ MHz	30 dBc (typical)
$f_c - 150$ MHz	50 dBc (typical)
$f_c \pm 100$ MHz	30 dBc (typical)
Other Bands	
$f < 900$ MHz	80 dBc (typical)
$f > 150$ MHz	80 dBc (typical)

**LNA Gain** 43 dB (typical)

### Gain at Zenith (90°)

L1/E1/B1	+5.0 dBic (minimum)
L2 /L5/E5	+5.0 dBic (minimum)
B2/B3/E6	+5.0 dBic (minimum)

**Noise Figure** 2.0 dB (typical)

**VSWR** 1.5 : 1

**Phase Centre Offset** <2 mm<sup>1</sup>

**Altitude** IEC-68-2-13  
(-400 to +10,400 m)

## Physical and Electrical

**Dimensions** 380 mm diameter  
x 200 mm

**Weight** 7.6 kg

### Power

Input Voltage +3.3 to +12.0 VDC  
Power Consumption 100 mA (typical)

**Nominal Impedance** 50 Ω

**Connector** N-type with  
TNC adapter supplied

## Environmental

### Temperature

Operating	-55° C to +85° C
Storage	-55° C to +90° C

### Humidity

ISO-9022-13-06  
100% non-condensing

### Solar Radiation

IEC-68-2-5

### Resistance to Corrosion

IEC-60950-22

### Water Ingress

IEC-60529 IPX6  
and IPX7

### Dust Ingress

IEC-605929 IPX6

### Salt Fog

IEC-68-2-11

### Sinusoidal Vibration (operating)

ISO 9022-3 Method 36

### Shock

MIL-STD-810F, 516.5


### Compliance

FCC, CE


## Elevation Gain Patterns

The plots below represent the typical right-hand circular polarized (RHCP) and left-hand circular polarized (LHCP) normalized radiation patterns for all GNSS frequencies.


GNSS-750 Radiation Pattern - Upper Bands

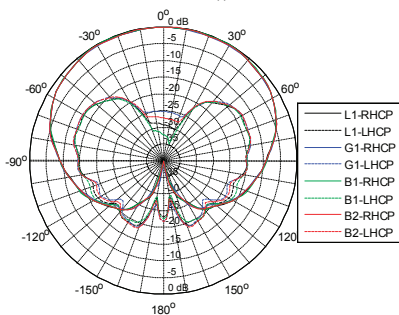

GNSS-750 Radiation Pattern - Mid Bands

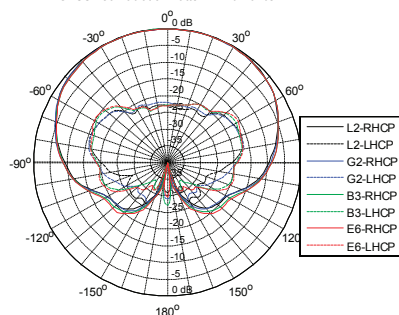

GNSS-750 Radiation Pattern - Lower Bands

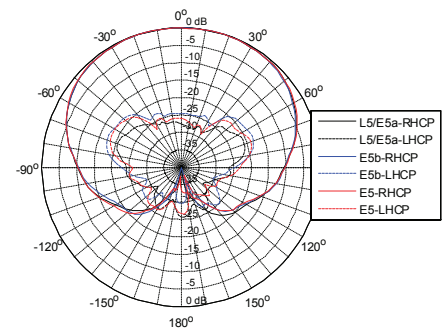

Version 3 - Specifications subject to change without notice.

©2011 NovAtel Inc. All rights reserved.

NovAtel is a registered trademark of NovAtel Inc.

Printed in Canada. D13333

GNSS-750 September 2011

For the most recent details of this product:

[novatel.com/Documents/Papers/GNSS-750.pdf](http://novatel.com/Documents/Papers/GNSS-750.pdf)

<sup>1</sup> Antenna calibration data is published on the NGS website: <http://www.ngs.noaa.gov/ANTCAL/> and Geo++ website: <http://gnpcvdb.geopp.de/pcvdb/GNPCVDB.html>.



Contact NavtechGPS for product details. [www.NavtechGPS.com](http://www.NavtechGPS.com)  
+1-703-256-8900 • 800-628-0885 • [info@navtechgps.com](mailto:info@navtechgps.com)