



## Dual Frequency Antenna Delivers Excellent Performance, Multipath Rejection and L-band Functionality

### Benefits

Single antenna solution reduces costs

Can be used in any positioning mode

Eliminates need for future redesign

### Features

Access to OmniSTAR and CDGPS L-band signals

Enhanced RTK performance

Excellent multipath rejection

RoHS compliant

### Exceptional L-band Reception

The GPS-702L antenna allows users to take advantage of the improved positioning accuracy provided by L-band technology. Free CDGPS L-band corrections are available to users within North America, providing sub-metre accuracy with a data signal structured to perform well in difficult environmental conditions. Worldwide, OmniSTAR® subscription-based services offers real-time DGPS positioning with metre to decimetre-level accuracy.

### Enhanced RTK Performance

The GPS-702L delivers enhanced RTK performance for high accuracy, real-time positioning applications. Closely located L1 and L2 phase centres combined with high phase centre stability ensures optimal RTK operation, even over long baselines. The antenna includes NovAtel's proprietary Pinwheel™ technology providing excellent multipath rejection. As a result, this antenna enables the versatility to work in virtually any positioning mode.

### Durable, Future-Proof Design

Enclosed in a durable, waterproof housing, the GPS-702L meets MIL-STD-810F for vibration and salt spray. Sharing the same form factor as other NovAtel GPS-700 series antennas, the GPS-702L antenna is compact and lightweight, making it highly portable and suitable for a wide variety of environments and applications.

The antenna meets the European Union's directive for Restriction of Hazardous Substances (RoHS), integrators can be confident the GPS-702L antenna can be used in system designs for years to come.

If you require more information about our antennas, visit [novatel.com/products/gnss-antennas](http://novatel.com/products/gnss-antennas)



[novatel.com](http://novatel.com)

[sales@novatel.com](mailto:sales@novatel.com)

1-800-NOVATEL (U.S. and Canada)

or 403-295-4900

China 0086-21-54452990-8011

Europe 44-1993-848-736

SE Asia and Australia 61-400-883-601

For more information contact

**NavtechGPS**

Your ONE Source for GNSS Products and Solutions

+1-703-256-8900 or 800-628-0885

[info@NavtechGPS.com](mailto:info@NavtechGPS.com)

[www.NavtechGPS.com](http://www.NavtechGPS.com)

**Performance****3 dB Pass Band**

L1	1575±20 MHz (typical)
L2	1228±20 MHz (typical)
L-band	1543±20 MHz (typical)

**Out-of-Band Rejection**

L1, L-band ( $f_c=1555$ MHz)	
$f_c \pm 75$ MHz	30 dBc (typical)
$f_c \pm 100$ MHz	50 dBc (typical)
L2 ( $f_c=1227$ MHz)	
$f_c + 50$ MHz	25 dBc (typical)
$f_c - 50$ MHz	30 dBc (typical)
$f_c \pm 100$ MHz	50 dBc (typical)

<b>LNA Gain</b>	27 dB (typical)
-----------------	-----------------

**Gain at Zenith (90°)**

L1	+5.0 dBic (minimum)
L2	+1.5 dBic (minimum)
L-band	+5.0 dBic (minimum)

**Gain Roll-Off (from Zenith to Horizon)**

L1	13 dB
L2	12 dB
L-band	13 dB

<b>Noise Figure</b>	2.5 dB (typical)
---------------------	------------------

<b>VSWR</b>	≤2.0 : 1
-------------	----------

**L1-L2 Differential**

<b>Propagation Delay</b>	15 ns (maximum)
--------------------------	-----------------

<b>Nominal Impedance</b>	50 Ω
--------------------------	------

<b>Altitude</b>	9,000 m
-----------------	---------

**Physical and Electrical****Dimension**185 mm diameter<sup>1</sup> x 69 mm**Weight**

500 g

**Power**

Input Voltage	+4.5 to +18.0 VDC
Power Consumption	33 mA (typical)

**Connector**

TNC female

**Environmental****Temperature**

Operating -40°C to +85°C

Storage -55°C to +85°C

<b>Humidity</b>	95% non-condensing
-----------------	--------------------

**Vibration (operating)**

Random MIL-STD-810F

Sinusoidal ASAE 5.15.2, Level 1

<b>Shock</b>	IEC 68-2-27, Ea
--------------	-----------------

<b>Bump</b>	IEC 68-2-29, Eb
-------------	-----------------

<b>Salt Spray</b>	MIL-STD-810F, 509.4
-------------------	---------------------

<b>Waterproof</b>	IEC 60529 IPX7
-------------------	----------------

**Compliance**


FCC, CE

RoHS EU Directive 2002/95/EC


**Elevation Gain Patterns**

These plots represent the typical right-hand polarized (RHP) and left-hand polarized (LHP) normalized radiation patterns for the L1 frequency, the L2 frequency and the L-band, respectively.


UUT Upper Band Radiation Pattern

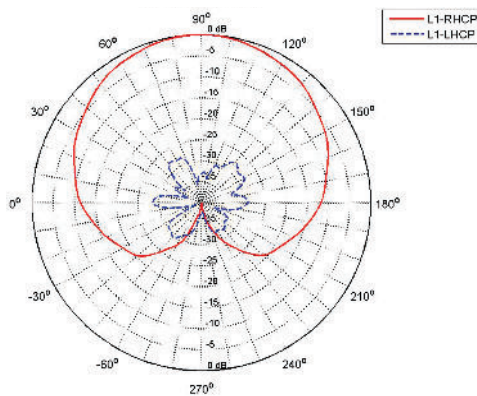

UUT Lower Band Radiation Pattern

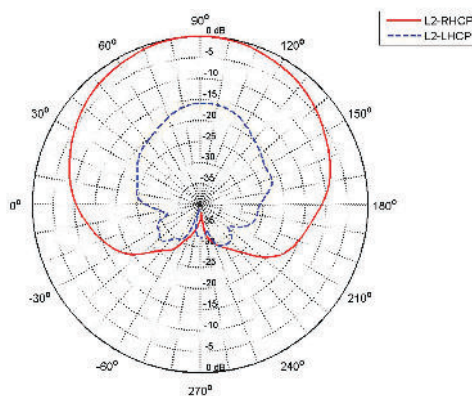

UUT L-Band Radiation Pattern

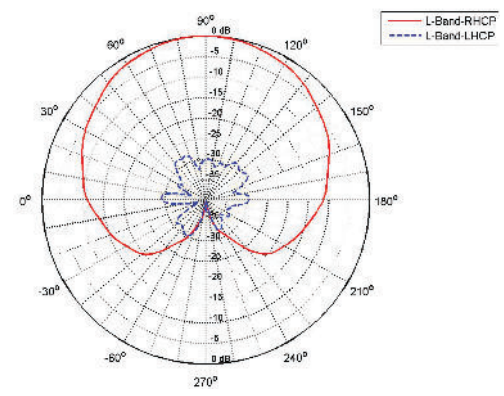

Version 6 - Specifications subject to change without notice.

<sup>1</sup> Not including tape measure tab. Full diameter with tape measure tab is 195 mm.

©2011 Novatel Inc. All rights reserved.

Novatel is a registered trademark of Novatel Inc.

Pinwheel is a trademark of Novatel Inc.

OmniSTAR is a registered trademark of OmniSTAR Inc.

Printed in Canada. D08407

GPS-702L September 2011

For the most recent details of this product:

[novatel.com/Documents/Papers/GPS-702L.pdf](http://novatel.com/Documents/Papers/GPS-702L.pdf)