



## Triple Frequency Pinwheel™ Antenna Maximizes Tracking Capabilities

### Benefits

Receives all usable GNSS frequencies in a single antenna

High quality measurements and stable phase centre for precision applications

### Features

L1, L2 and L5

GPS+GLONASS+Galileo signal reception

Excellent multipath rejection

Highly stable phase centre

RoHS compliant

### Maximize Performance with Multi-Constellation Reception

The GPS-703-GGG receives L1, L2, and L5 GNSS frequencies and offers combined GPS+GLONASS+Galileo signal reception. Customers can use the same antenna for GPS-only, dual or triple constellation applications, resulting in increased flexibility and reduced equipment costs.

### Stable Phase Centre

The phase centre of this antenna remains constant as the azimuth and elevation angle of the satellites change. Signal reception is unaffected by the rotation of the antenna or satellite elevation, so placement and installation of the antenna can be completed with ease. With the phase centre in the same location for the L1, L2 and L5 signals and with minimal phase centre variation between antennas, this antenna is ideal for baselines of any length.

### Durable, Future-Proof Design

This rugged antenna is enclosed in a durable, waterproof housing and meets MIL-STD-202F for vibration and MIL-STD-810F for salt spray. With the same form factor as other NovAtel GPS-700 series antennas, the GPS-703-GGG antenna is compact and lightweight, making it highly portable and suitable for a wide variety of environments and applications.

Meeting the European Union's directive for Restriction of Hazardous Substances (RoHS), integrators can be confident the GPS-703-GGG antenna can be used in system designs for years to come.

For more information contact

**NavtechGPS**

Your ONE Source for GNSS Products and Solutions

+1-703-256-8900 or 800-628-0885

info@NavtechGPS.com

www.NavtechGPS.com

If you require more information about our antennas,  
visit [novatel.com/products/gnss-antennas](http://novatel.com/products/gnss-antennas)



[novatel.com](http://novatel.com)

[sales@novatel.com](mailto:sales@novatel.com)

1-800-NOVATEL (U.S. and Canada)

or 403-295-4900

China 0086-21-54452990-8011

Europe 44-1993-848-736

SE Asia and Australia 61-400-883-601

**Performance****3 dB Pass Band**

L1	1580.5±28.5 MHz (typical)
L2/L5	1210.0±45.0 MHz (typical)

**Out-of-Band Rejection**

L1±100 MHz	30 dBc (typical)
L2±200 MHz	50 dBc (typical)

<b>LNA Gain</b>	29 dB (typical)
-----------------	-----------------

**Gain at Zenith (90°)**

L1	+5.0 dBic (minimum)
L2	+3.0 dBic (minimum)
L5	+3.0 dBic (minimum)

**Gain Roll-Off (from Zenith to Horizon)**

L1	12 dB
L2	13 dB
L5	13 dB

<b>Noise Figure</b>	2.0 dB (typical)
---------------------	------------------

<b>VSWR</b>	≤2.0 : 1
-------------	----------

<b>L1-L2 Differential Propagation Delay</b>	5 ns (maximum)
---	----------------

<b>Nominal Impedance</b>	50 Ω
--------------------------	------

<b>Altitude</b>	9,000 m
-----------------	---------

**Physical and Electrical****Dimensions**185 mm diameter<sup>1</sup> x 69 mm**Weight**

500 g

**Power**

Input Voltage	+4.5 to +18.0 VDC
Power Consumption	36 mA (typical)

**Connector**

TNC female

**Environmental****Temperature**

Operating	-40°C to +85°C
Storage	-55°C to +85°C

<b>Humidity</b>	95% non-condensing
-----------------	--------------------

**Vibration (operating)**

Random	MIL-STD-810F
Sinusoidal	SAEJ1211, Section 4.7

<b>Shock</b>	IEC 68-2-27 (Ea)
--------------	------------------

<b>Bump</b>	IEC 68-2-29 (Eb)
-------------	------------------


<b>Salt Spray</b>	MIL-STD-810F, 509.4
-------------------	---------------------

<b>Waterproof</b>	IEC 60529 IPX6/IPX7
-------------------	---------------------

<b>Compliance</b>	FCC, CE
<b>RoHS</b>	EU Directive 2002/95/EC

**Elevation Gain Patterns**

These plots represent the typical right-hand polarized (RHP) and left-hand polarized (LHP) normalized radiation patterns for the L1 frequency, the L2 frequency and the L5 frequency, respectively.

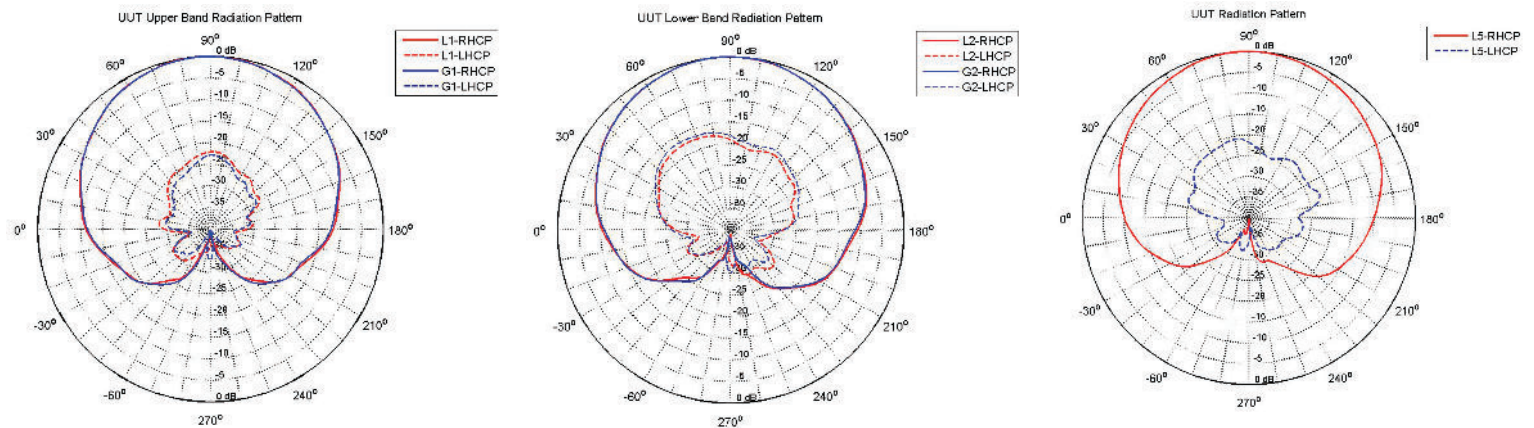

Version 4 -Specifications subject to change without notice.

<sup>1</sup> Not including tape measure tab. Full diameter with tape measure tab is 195 mm.

©2011 NovAtel Inc. All rights reserved.

NovAtel is a registered trademark of NovAtel Inc.

Pinwheel is a trademark of NovAtel Inc.

Printed in Canada. D13878

GPS-703-GGG September 2011

For the most recent details of this product:

[novatel.com/Documents/Papers/GPS703GGG.pdf](http://novatel.com/Documents/Papers/GPS703GGG.pdf)