

HC871E

NavtechGPS
+1-703-256-8900 or 800-628-0885
info@NavtechGPS.com
www.NavtechGPS.com

CALIAN
Confidence. Engineered.

Embedded Multi-Constellation Dual-Band Antenna

Frequency Coverage: GPS L1, L2 | GALILEO E1 | BEIDOU B1 | GLONASS G1, G2

The patented HC871E embedded helical antenna is designed for precision positioning, covering the GPS/QZSS-L1/L2, GLONASS-G1/G2, Galileo-E1, and BeiDou-B1 frequency bands, including the satellite-based augmentation system (SBAS) available in the region of operation [WAAS (North America), EGNOS (Europe), MSAS (Japan), or GAGAN (India)].

Weighing only 8 g, The light and compact HC871E features a precision-tuned helix element that provides excellent axial ratios and operates without the requirement of a ground plane, making it ideal for a variety of applications, including uncrewed aerial vehicles (UAVs).

The HC871E features an industry-leading low current, low-noise amplifier (LNA) that includes an integrated low-loss pre-filter to prevent harmonic interference from high-amplitude signals, such as 700 MHz band LTE and other nearby in-Band cellular signals.

Tallysman provides an optional embedded helical mounting ring, which traps the outer edge of the antenna circuit board to the host circuit board or to any flat surface. Tallysman also provides support for installation and integration of embedded helical antennas to enable the integrator to achieve a successful installation and obtain optimum antenna performance.

Mounting instructions available on our product page.



Applications

- Autonomous uncrewed aerial vehicles (UAVs)
- Precision GNSS positioning
- Precision land survey positioning
- Mission-critical GNSS timing
- Network timing and synchronization
- Sea and land container tracking
- Fleet management and asset tracking
- Marine and avionics systems
- Law enforcement and public safety

Features

- Very low noise preamp (2.0 dB typ.)
- Axial ratio (≤ 0.5 dB at zenith)
- LNA gain (28 dB typ.)
- Low current (15 mA typ.)
- ESD circuit protection (15 kV)
- Invariant performance from 2.5 to 16 VDC
- REACH and RoHS compliant

Benefits

- Extremely light (5 g)
- Ideal for RTK and PPP surveying systems
- Excellent RH circular polarized signal reception
- Great multipath rejection
- Increased system accuracy
- Excellent signal-to-noise ratio
- Industrial temperature range

About Calian: With global headquarters and manufacturing in Ottawa, Canada, Calian is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at www.calian.com

Revision: 202203

Contact us:
info@tallysman.com
T: +1 613 591-3131

Embedded Multi-Constellation Dual-Band Antenna

Frequency Coverage: GPS L1, L2 | GALILEO E1 | BEIDOU B1 | GLONASS G1, G2

Antenna

Technology Dual-frequency, RHCP quadrifilar helix

| | | Gain dBic typ. at Zenith | Axial Ratio dB at Zenith |
|---------------------------------------|----------------------|-----------------------------|-----------------------------|
| GNSS | | | |
| GPS / QZSS | L1 | 1.6 | ≤ 0.5 |
| | L2 | 1.7 | ≤ 0.5 |
| | L5 | - | - |
| GLONASS | G1 | 1.2 | ≤ 0.5 |
| | G2 | 1.7 | ≤ 0.5 |
| | G3 | - | - |
| Galileo | E1 | 1.6 | ≤ 0.5 |
| | E5A | - | - |
| | E5B | - | - |
| | E6 | - | - |
| BeiDou | B1 | 1.6 | ≤ 0.5 |
| | B2b | - | - |
| | B2a | - | - |
| | B3 | - | - |
| IRNSS / NavIC | L5 | - | - |
| QZSS | L6 | - | - |
| L-Band Services (1525 MHz - 1559 MHz) | | - | - |
| Satellite Communications | | | |
| Iridium | | - | - |
| Globalstar | | - | - |
| Other | | | |
| Axial Ratio at 10° | - | Efficiency | - |
| PC Variation | ± 3.0 mm (all freq.) | PCO (mm) | - |

Mechanicals

| | |
|----------------------|-------------------------------------|
| Mechanical Size | 27.5 mm (dia.) x 49.6 mm (h.) |
| Weight | 5 g |
| Radome | - |
| Mount | Helical mounting ring P/N 23-0219-0 |
| Available Connectors | MCX (female) |

Environmental

| | |
|-----------------------|--|
| Operating Temperature | -40 °C to +85 °C |
| Storage Temperature | -55 °C to +95 °C |
| Vibration | MIL-STD-810-G - Test Method 514.6 |
| Shock | - |
| Salt Fog | - |
| IP Rating | - |
| Compliance | IPC-A-610, FCC, RED / CE Mark, RoHS, REACH |

Warranty


| | |
|------------------|--------------------------|
| Parts and Labour | 1-year standard warranty |
|------------------|--------------------------|

Low Noise Amplifier (LNA) - Measured at 3V and 25°C

| Frequency Bandwidth | | Out of Band Rejection |
|---------------------|-----------------|--|
| Lower Band | 1217 - 1255 MHz | > 46 dB @ < 1100 MHz > 40 dB @ < 1190 MHz |
| L-Band Corr. | - | > 48 dB @ < 1400 MHz > 39 dB @ < 1500 MHz > 38 dB @ > 1625 MHz > 57 dB @ > 1700 MHz |
| Upper Band | 1559 - 1606 MHz | |

| | |
|------------------------|--|
| Architecture | Pre-filtered |
| Gain | 28 dB typ., 35 dB typ. |
| Noise Figure | 2.0 dB typ. |
| VSWR | < 1.5:1 typ., 1.8:1 max. |
| Supply Voltage Range | 2.5 to 16 VDC nominal, up to 50mV p-p ripple |
| Supply Current | 15 mA typ. |
| ESD Circuit Protection | 15 kV air discharge |
| P 1dB Output | 11 dBm typ. |
| Group Delay | 15 ns (L1), 10 ns (L2) |

Mechanical Diagram - Units in 'mm'

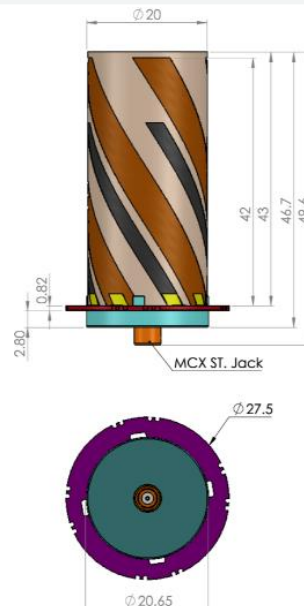

Ordering Information

Part Number **33-HC871E**

Please refer to our **Ordering Guide** to review available radomes and connectors at:
<https://www.tallysman.com/resource/tallysman-ordering-guide/>



Contact NavtechGPS for product details. www.NavtechGPS.com
+1-703-256-8900 • 800-628-0885 • info@navtechgps.com