

# HC976E



+1-703-256-8900 or 800-628-0885  
info@NavtechGPS.com  
www.NavtechGPS.com



**CALIAN**<sup>®</sup>  
Confidence. Engineered.

## Embedded Multi-Constellation Triple-Band Antenna

Frequency Coverage: GPS L1, L2 | QZSS L6 | GALILEO E1, E6 | BEIDOU B1, B3 | GLONASS G1, G2 + L-Band


The patented HC976E embedded helical antenna is designed for precision positioning, covering the GPS/QZSS-L1/L2, QZSS-L6, GLONASS-G1/G2, Galileo-E1/E6, and BeiDou-B1/B3 frequency bands, including the satellite-based augmentation system (SBAS) available in the region of operation [WAAS (North America), EGNOS (Europe), MSAS (Japan), or GAGAN (India)], as well as L-Band correction services.

Weighing only 8 g, the light and compact HC976E features a precision-tuned helix element that provides excellent axial ratios and operates without the requirement of a ground plane, making it ideal for a wide variety of applications, including unmanned aerial vehicles (UAVs).

The HC976E features an industry-leading low current, low-noise amplifier (LNA) that includes an integrated low-loss pre-filter to prevent harmonic interference from high-amplitude signals, such as 700 MHz band LTE and other nearby in-Band cellular signals.

Tallysman provides an optional embedded helical mounting ring, which traps the outer edge of the antenna circuit board to the host circuit board or to any flat surface. Tallysman also provides support for installation and integration of embedded helical antennas to enable the integrator to achieve a successful installation and obtain optimum antenna performance.

Mounting instructions available on our product page.

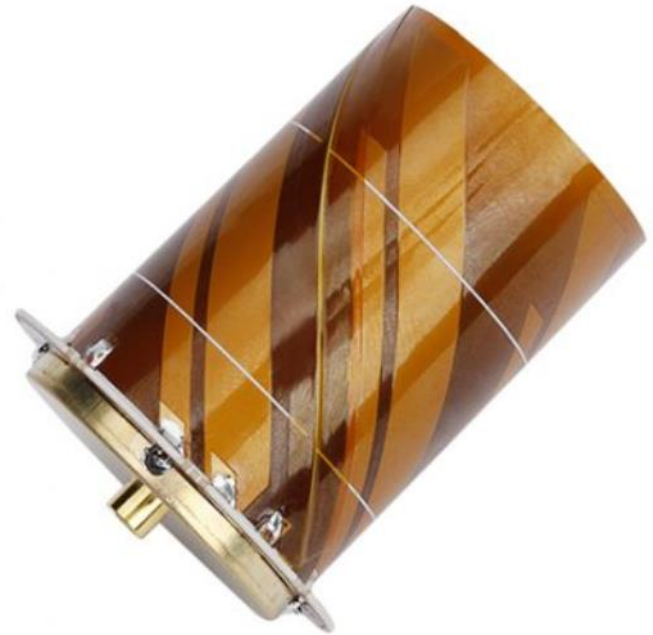

### Applications

- Autonomous unmanned aerial vehicles (UAVs)
- Precision GNSS positioning
- Precision land survey positioning
- Mission-critical GNSS timing
- Network timing and synchronization
- Sea and land container tracking
- Fleet management and asset tracking
- Marine and avionics systems
- Law enforcement and public safety

### Features

- Very low noise preamp (2.0 dB typ.)
- Axial ratio ( $\leq 0.5$  dB at zenith)
- LNA gain (28 dB typ., 35 dB typ.)
- Low current (15 mA typ., 21 mA typ.)
- ESD circuit protection (15 kV)
- Invariant performance from 2.5 to 16 VDC
- REACH, and RoHS compliant

### Benefits

- Extremely light (8 g)
- Ideal for RTK and PPP surveying systems
- Excellent RH circular polarized signal reception
- Great multipath rejection
- Increased system accuracy
- Excellent signal-to-noise ratio
- Industrial temperature range

**About Calian:** With global headquarters and manufacturing in Ottawa, Canada, Calian is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at [www.calian.com](http://www.calian.com)

Revision: 202203

Contact us:  
info@tallysman.com  
T: +1 613 591-3131

# Embedded Multi-Constellation Triple-Band Antenna

Frequency Coverage: GPS L1, L2 | QZSS L6 | GALILEO E1, E6 | BEIDOU B1, B3 | GLONASS G1, G2 + L-Band

## Antenna

Technology Triple-frequency, RHCP quadrifilar helix

		Gain	Axial Ratio
		dBic typ. at Zenith	dB at Zenith
<b>GNSS</b>			
GPS / QZSS	L1	2.5	≤ 0.5
	L2	1.4	≤ 0.5
	L5	-	-
GLONASS	G1	1.5	≤ 0.5
	G2	2.6	≤ 0.5
	G3	-	-
Galileo	E1	2.5	≤ 0.5
	E5A	-	-
	E5B	-	-
	E6	1.6	≤ 0.5
BeiDou	B1	2.5	≤ 0.5
	B2b	-	-
	B2a	-	-
	B3	2.3	≤ 0.5
IRNSS / NavIC	L5	-	-
QZSS	L6	1.6	≤ 0.5
L-Band Services		1.5	≤ 0.5
<b>Satellite Communications</b>			
Iridium		-	-
Globalstar		-	-
<b>Other</b>			
Axial Ratio at 10°	-	Efficiency	-
PC Variation	± 3.0 mm (all freq.)	PCO (z-axis, mm)	-

## Mechanicals

Mechanical Size	38.7 mm (dia.) x 49.7 mm (h.)
Weight	8 g
Radome	-
Mount	Helical mounting ring P/N 23-0220-0
Available Connectors	MCX (female)

## Environmental

Operating Temperature	-40 °C to + 85 °C
Storage Temperature	-50 °C to + 95 °C
Vibration	MIL-STD-810-G - Test Method 514.6
Shock	-
Salt Fog	-
IP Rating	-
Compliance	IPC-A-610, FCC, RED / CE Mark, RoHS, REACH

## Warranty:

Parts and Labour	1-year standard warranty
------------------	--------------------------

## Low Noise Amplifier (LNA) - Measured at 3V and 25°C


Frequency Bandwidth	Out of Band Rejection
Lower Band	1217 - 1300 MHz
L-Band Corr.	1539 - 1559 MHz
Upper Band	1559 - 1606 MHz

> 60 dB @ < 1000 MHz  
> 33 dB @ < 1100 MHz  
> 30 dB @ > 1350 MHz

> 32 dB @ < 1500 MHz  
> 30 dB @ > 1700 MHz

Architecture	Pre-filtered
Gain	28 dB typ., 35 dB typ.
Noise Figure	2.0 dB typ.
VSWR	< 1.5:1 typ., 1.8:1 max.
Supply Voltage Range	2.5 to 16 VDC nominal, up to 50mV p-p ripple
Supply Current	15 mA typ. (28 dB), 21 mA typ. (35 dB)
ESD Circuit Protection	15 kV air discharge
P 1dB Output	11 dBm typ.
Group Delay	5 ns @ L1   5 ns @ L2

## Mechanical Drawing - Units in 'mm'

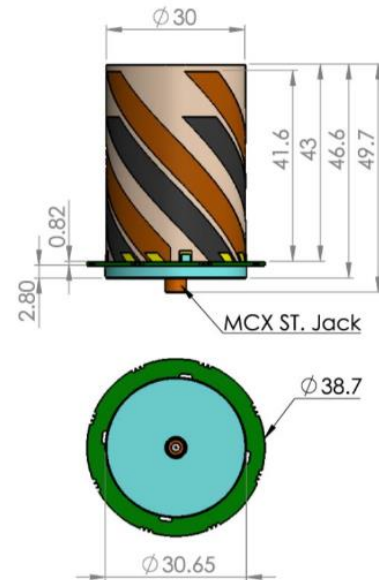

## Ordering Information

Part Number **33-HC976E-GG**

where GG = gain (28 or 35 dB)

Please refer to our **Ordering Guide** to review available radomes and connectors at:  
<https://www.tallysman.com/resource/tallysman-ordering-guide/>



Contact NavtechGPS for product details. [www.NavtechGPS.com](http://www.NavtechGPS.com)  
+1-703-256-8900 • 800-628-0885 • [info@navtechgps.com](mailto:info@navtechgps.com)