

TW3150

NavtechGPS
+1-703-256-8900 or 800-628-0885
info@NavtechGPS.com
www.NavtechGPS.com

CALIAN
Confidence. Engineered.

High Gain GPS-L1 Antenna

Frequency Coverage: GPS L1

The TW3150 is a high-gain GPS antenna specifically designed for timing applications in high density cell / telecommunications tower applications where high levels of near-out-of-band interfering signals can be expected. This antenna features a 50 dB LNA gain to handle long cable runs often associated with installation on telecommunications towers.

The TW3150 covers the GPS-L1 and SBAS (WAAS, EGNOS & MSAS) frequency band and employs Calian's patented Accutenna® technology to provide excellent cross polarization rejection and greatly enhanced multipath rejection.

The TW3150 features a four (4) stage dual filtered LNA.

The TW3150 housing has a permanent-mount, IP69K compliant metal base, and an extended temperature range plastic radome, and is specifically designed to withstand the most challenging environmental conditions.

Two options for pole mounting are available an L-bracket (P/N# 23-0040-0) or a pipe mount (P/N# 23-0065-0).



Applications

- Timing systems
- Long cable runs

Features

- Dual-feed Patch Antenna
- Low Loss SAW Pre-Filter
- Great axial ratio: 1 dB typ.
- Low noise LNA: 1.5 dB typ.
- High-gain LNA: 50 dB typ.
- Low current: 25 mA typ.
- Wide voltage input range: 2.7 to 26 VDC
- IP69K weatherproof housing

Benefits

- Great out-of-band rejection
- Excellent multipath rejection
- Excellent circular polarisation
- Excellent signal-to-noise ratio
- Increased system accuracy
- Ideal for harsh environments
- CE RED, RoHS, and REACH compliant



Contact NavtechGPS for product details. www.NavtechGPS.com
+1-703-256-8900 • 800-628-0885 • info@navtechgps.com

High Gain GPS-L1 Antenna

Frequency Coverage: GPS L1

Antenna - Measured with a 100 mm ground plane

Technology Dual-feed RHCP ceramic patch

| | | Gain | Axial Ratio |
|---------------------------------------|-----|---------------------|--------------|
| | | dBic typ. at Zenith | dB at Zenith |
| GNSS | | | |
| GPS / QZSS | L1 | 4.5 | ≤ 1 |
| | L2 | - | - |
| | L5 | - | - |
| GLONASS | G1 | - | - |
| | G2 | - | - |
| | G3 | - | - |
| Galileo | E1 | - | - |
| | E5A | - | - |
| | E5B | - | - |
| | E6 | - | - |
| BeiDou | B1 | - | - |
| | B2b | - | - |
| | B2a | - | - |
| | B3 | - | - |
| IRNSS / NavIC | L5 | - | - |
| QZSS | L6 | - | - |
| L-Band Services (1539 MHz - 1559 MHz) | | - | - |
| Satellite Communications | | | |
| Iridium | | - | - |
| Globalstar | | - | - |
| Other | | | |
| Axial Ratio at 10° | - | Efficiency | - |
| PCV $\Phi > 15^\circ$ | - | PCO | - |

Mechanicals

| | |
|----------------------|---|
| Size | 66.5 mm (dia.) x 21 mm (h.) |
| Weight | 150 g |
| Radome | LEXAN™ EXL9330, Base: Zamac Metal |
| Mount | Through-hole (100 mm ground plane provided) |
| Available Connectors | Please refer to ordering guide |

Environmental

| | |
|-----------------------|---|
| Operating Temperature | -40 °C to +85 °C |
| Storage Temperature | -55 °C to +95 °C |
| Vibration | MIL-STD-810-E - Test Method 514.5 |
| Shock | MIL-STD-810-G - Test Method 516.6 |
| Salt Fog | MIL-STD-810-F - Test Method 509.5 |
| Other Tests | Hail, Humidity, Dust, Rain, Sand, Solar |
| IP Rating | IP69K |
| Compliance | IPC-A-610, FCC, CE RED, RoHS, REACH |

Warranty


| | |
|------------------|--------------------------|
| Parts and Labour | 3-year standard warranty |
|------------------|--------------------------|

Low Noise Amplifier (LNA) - Measured at 3V and 25°C

| Frequency Bandwidth | | Out of Band Rejection |
|---------------------|--------------------------|--|
| Lower Band | - | - |
| L-Band Corr. | - | > 40 dB @ < 1545 MHz > 30 dB @ > 1610 MHz |
| Upper Band | 1575.42 MHz \pm 10 MHz | |

| | |
|------------------------|--|
| Architecture | Non pre-filtered |
| Gain | 48 dB min. |
| Noise Figure | 1.5 dB typ. |
| VSWR | < 1.5:1 typ., 2.0:1 max. |
| Supply Voltage Range | 2.5 to 16 VDC nominal, up to 50mV p-p ripple |
| Supply Current | 25 mA typ., 30 mA max |
| ESD Circuit Protection | 15 kV air discharge |
| P 1dB Output | - |
| Group Delay | 90 ns typ. |

Mechanical Diagram - Units in 'mm' or 'inches' where specified

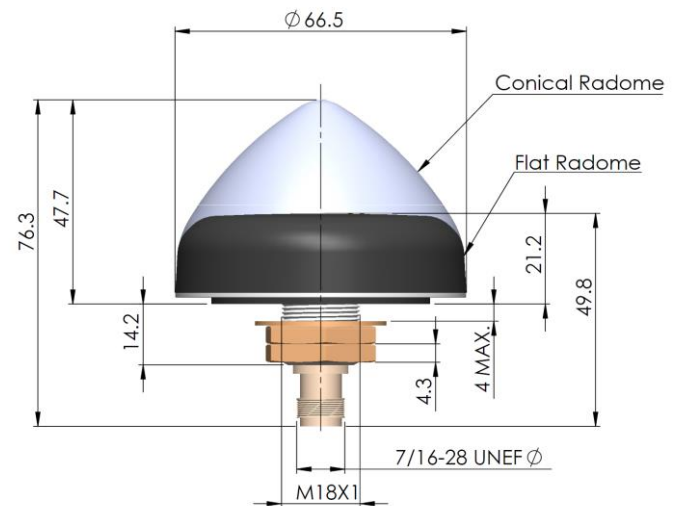

Ordering Information

Part Number 33-3150-xx-yy-zzzz

Where xx = connector type, yy = shape and colour of radome and zzzz = cable length in mm (where applicable)

Please refer to our **Ordering Guide** to review available radomes and connectors at:
<https://www.tallysman.com/resource/tallysman-ordering-guide/>



Contact NavtechGPS for product details. www.NavtechGPS.com
+1-703-256-8900 • 800-628-0885 • info@navtechgps.com