

TW3400

NavtechGPS®
+1-703-256-8900 or 800-628-0885
info@NavtechGPS.com
www.NavtechGPS.com

CALIAN®
Confidence. Engineered.

GPS-L1/GLONASS-G1 Antenna

Frequency Coverage: GPS L1 | GLONASS G1

The TW3400 employs Calian's patented Accutenna® technology and covers the GPS-L1, GLONASS-G1 and SBAS (WAAS, EGNOS & MSAS) frequency band (1575 to 1606 MHz). It is especially designed for precision industrial, agricultural, safety and security applications. The TW3400 provides truly circular response over the antennas' entire bandwidth thereby producing superior multipath signal rejection.

The TW3400 features a highly circular dual-feed wideband patch element, with a two-stage low-noise amplifier, comprised of one input LNA per feed, a mid section SAW to filter the combined output, and a final output gain stage. This configuration provides an excellent axial ratio that is constant across the full frequency band.

The TW3400 is housed in a permanent-mount industrial-grade weatherproof enclosure. Optional components include a 10 cm ground plane (P/N 23-0067-0), an L-bracket mount (P/N 23-0040-0) or a pipe mount (P/N 23-0065-0).



Applications

- High-accuracy & mission-critical global positioning
- Precision agriculture, mining, and construction
- Law enforcement and public safety
- Avionics
- Law enforcement and public safety
- Fleet management and asset tracking

Features

- Great axial ratio: 1.0 dB typ.
- Low noise LNA: 1 dB typ.
- High-rejection SAW filter
- High-gain LNA (28 dB typ.)
- Wide voltage input range (2.5 to 16 VDC)
- Low current: 15 mA typ.
- IP69K weatherproof housing

Benefits

- Excellent circular polarisation
- Excellent multipath rejection
- Excellent signal-to-noise ratio
- Great out-of-band signal rejection
- Increased system accuracy
- Ideal for harsh environments
- CE RED, RoHS, and REACH compliant

About Calian: With global headquarters and manufacturing in Ottawa, Canada, Calian is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at www.calian.com

Revision: 202407

Contact us:
info@tallysman.com
T: +1 613 591-3131

GPS-L1/GLONASS-G1 Antenna

Frequency Coverage: GPS L1 | GLONASS G1

Antenna - Measured with a 100 mm ground plane

Technology Dual-feed RHCP ceramic patch

		Gain dBic typ. at Zenith	Axial Ratio dB at Zenith
GNSS			
GPS / QZSS	L1	4.3	≤ 1
	L2	-	-
	L5	-	-
GLONASS	G1	4.3	≤ 1
	G2	-	-
	G3	-	-
Galileo	E1	-	-
	E5A	-	-
	E5B	-	-
	E6	-	-
BeiDou	B1	-	-
	B2b	-	-
	B2a	-	-
	B3	-	-
IRNSS / NavIC	L5	-	-
QZSS	L6	-	-
L-Band Services (1539 MHz - 1559 MHz)		-	-
Satellite Communications			
Iridium		-	-
Globalstar		-	-
Other			
Axial Ratio at 10°		-	Efficiency
PCV $\Phi > 15^\circ$		-	PCO

Mechanicals

Size	66.5 mm (dia.) x 21 mm (h.)
Weight	150 g
Radome	LEXAN™ EXL9330, Base: Zamac Metal
Mount	Through-hole (100 mm ground plane provided)
Available Connectors	Please refer to ordering guide

Environmental

Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +95 °C
Vibration	MIL-STD-810-E - Test Method 514.5
Shock	MIL-STD-810-G - Test Method 516.6
Salt Fog	MIL-STD-810-F - Test Method 509.5
Other Tests	Hail, Humidity, Dust, Rain, Sand, Solar
IP Rating	IP69K
Compliance	IPC-A-610, FCC, CE RED, RoHS, REACH

Warranty


Parts and Labour	3-year standard warranty
------------------	--------------------------

Low Noise Amplifier (LNA) - Measured at 3V and 25°C

Frequency Bandwidth	Out of Band Rejection
Lower Band	-
L-Band Corr.	-
Upper Band	1575-1606 MHz

Architecture	Non pre-filtered
Gain	28 dB min.
Noise Figure	1 dB typ.
VSWR	< 1.5:1 typ., 1.8:1 max.
Supply Voltage Range	2.5 to 16 VDC nominal, up to 50mV p-p ripple
Supply Current	15 mA typ.
ESD Circuit Protection	15 kV air discharge
P 1dB Output	3.1 dBm @ 1575 MHz
Group Delay	8 ns typ. @ (1570.42 to 1580.42 MHz)

Mechanical Diagram - Units in 'mm' or 'inches' where specified

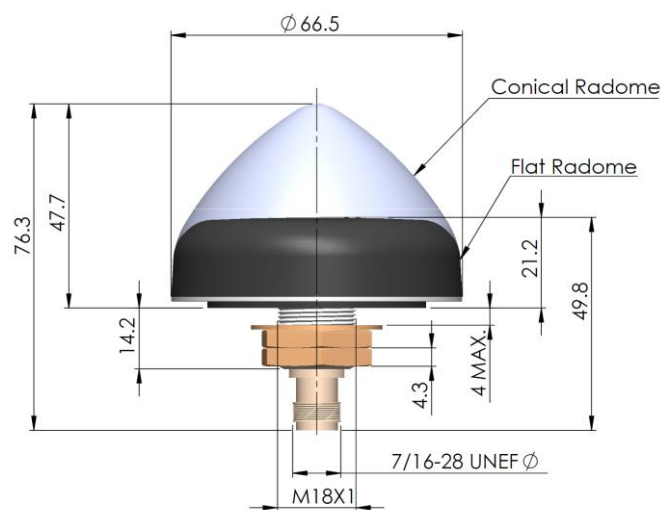

Ordering Information

Part Number 33-3400-xx-yy-zzzz

Where xx = connector type, yy = shape and colour of radome and zzzz = cable length in mm (where applicable)

Please refer to our **Ordering Guide** to review available radomes and connectors at:
<https://www.tallysman.com/resource/tallysman-ordering-guide/>



Contact NavtechGPS for product details. www.NavtechGPS.com
+1-703-256-8900 • 800-628-0885 • info@navtechgps.com