



Contact us for product details and pricing

NavtechGPS

+1-703-256-8900 or 800-628-0885

info@NavtechGPS.com

www.NavtechGPS.com



When precision matters...™

TW4320/TW4322 Wideband GPS/GLONASS Antenna

The TW4320/TW4322 is a wideband GNSS antenna covering the GPS L1, GLONASS L1 and SBAS (WAAS, EGNOS & MSAS) frequency bands (1575 to 1606 MHz). It features a small patch element with 40% wider bandwidth than previously available in this format. Unlike its competitors, both GPS-L1 and GLONASS signals are included in the 1dB received power bandwidth.

The TW4320/TW4322 has a two stage Low Noise Amplifier with a mid-section SAW. A tight pre-filter is available in the TW4322 to protect against saturation by high level sub-harmonics and L-Band signals.

Even with the wider bandwidth, the TW4320/TW4322 antenna is the smallest high performance antennas available. It is housed in a compact IP67 magnetic mount enclosure.

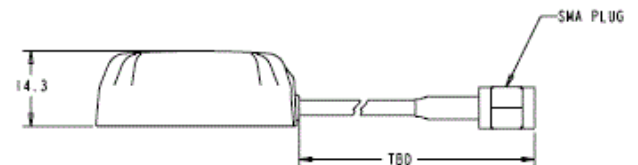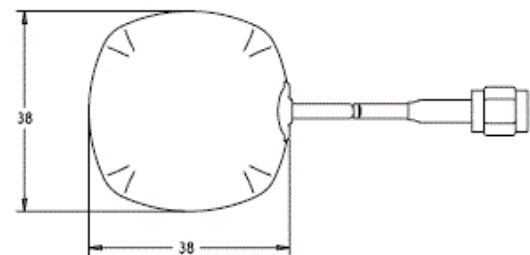

Applications

- Cost Sensitive Mission Critical Positioning
- Military & Security
- Covert surveillance
- Fleet Management & Asset Tracking

Features

- 40% wider bandwidth, small footprint
- Axial ratio: 6 dB Typ. (GPS & GLONASS)
- Low noise LNA: 1 dB
- High rejection mid-section SAW filter
- Available Pre-filter (TW4322)
- High gain: 28 dB typ.
- Wide voltage input range: 2.5 to 16 VDC

Benefits

- 1dB Bandwidth Includes GPS-L1 & GLONASS
- Excellent multipath rejection
- improved GNSS reliability
- Excellent signal to noise ratio
- RoHS compliant
- Ideal for harsh environments
- Excellent out of band signal rejection



Contact NavtechGPS for product details. www.NavtechGPS.com

+1-703-256-8900 • 800-628-0885 • info@navtechgps.com



When precision matters...™

TW4320/TW4322 Wideband GPS/GLONASS Antenna Specifications

Antenna

Architecture	Wideband Single Feed Patch
1 dB radiated power bandwidth	31 MHz
10dB Return Loss Bandwidth	45MHz
Antenna Gain (with 100mm ground plane)	4.5 dBiC
Axial Ratio (over full bandwidth)	6 dB typical, 8dB Maximum.
Polarization	RHCP

Electrical

Architecture	LNA stage 1 -> SAW filter-> LNA stage 2 (TW4320) SAW Pre-filter ->LNA stage 1 -> SAW filter-> LNA stage 2 (TW4322)		
Filtered LNA Frequency Bandwidth	1574 to 1606 MHz		
Gain	28dB min., 1575.42 to 1606 MHz		
Gain flatness	+/- 2 dB, 1575 to 1606 MHz		
Out-of-Band Rejection	<1500 MHz	>32 dB (TW4320)	>50dB (TW4322)
Out-of-Band Rejection	<1550 MHz	>25 dB	>50dB
Out-of-Band Rejection	>1640 MHz	>35 dB	>70dB
VSWR (at LNA output)	<1.5:1 typ. 1.8:1 max.		
Noise Figure	1 dB typ.(TW4320);	3.5 dB typ. (TW4322)	
Supply Voltage Range (over coaxial cable)	+2.5 to 16 VDC nominal		
Supply Current	12 mA max.		
ESD Circuit Protection	15 KV air discharge		

Mechanicals & Environmental

Mechanical Size	38mm x 38mm dia. x 14.3mm H
Cable	RG174
Operating Temp. Range	-40 °C to +85 °C
Enclosure	Radome and base: EXL9330
Weight	50 gm (Enclosure + SMA connector 34gm, cable 0.31gm/cm)
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G
Warranty	One year, parts and labour

Ordering Information

TW4320 – Wideband GPS Antenna	33-4320-xx-yyyy
TW4322 – Prefiltered Wideband GPS Antenna	33-4320-xx-yyyy

Where xx = connector type and yyyy = cable length in mm

Please refer to the Ordering Guide (<http://www.tallysman.com/orderingguide.php>) for the current and complete list of available radomes and connectors.

Tallysman Wireless Inc

36 Steacie Drive
Ottawa ON K2K 2A9 Canada
Tel +1 613 591 3131

Fax 613 591 3121 sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved.

Rev 2.3



Contact NavtechGPS for product details. www.NavtechGPS.com
+1-703-256-8900 • 800-628-0885 • info@navtechgps.com