

AsteRx3: GNSS Multi-frequency Receiver

AsteRx3 is a multi-frequency GPS/GLONASS/Galileo receiver for demanding industrial applications. AsteRx3 features proven simultaneous high-quality GPS, GLONASS and Galileo tracking and a range of innovative features, such as the patented Galileo AltBOC tracking, the advanced multipath mitigation algorithm APME, LOCK+ tracking for exceptional tracking stability under high vibration conditions, RTK+ for extended RTK baselines and faster initialisation, and AIM+, Septentrio's Advanced Interference Mitigation technology. AsteRx3 is plug-in compatible with AsteRx2 and AsteRx2e GPS/GLONASS receivers, allowing users the easiest possible preparation for and switchover to modernized GNSS signals from all constellations.

Tracking all visible signals


The AsteRx3 receiver family is powered by a next generation L1/L2/L5/E5ab AltBOC GPS/GLONASS/Galileo/SBAS/COMPASS-ready OEM receiver engine. Built around the 136 channel multi frequency multi constellation GReCo3 ASIC AsteRx3 is designed for high-performance multi-frequency applications.

The receiver provides high quality cm- level positioning as well as an extensive set of measurements at up to 100 Hz raw data and position including RTK at up to 25 Hz. Septentrio's A Posteriori Multipath Estimator (APME+), unique in its ability to tackle short-delay multipath, further enhances the quality of the measurement and position data generated with the receiver.

GNSS+™ technology

AsteRx3 hosts a suite of innovative tracking positioning algorithms specifically designed for the demanding industrial environment. These include:

- **APME+** extends APME to GLO, GAL and COMPASS
- **Lock+** exceptional stable tracking under high vibration conditions resulting in significant higher availability.
- **RTK+** extended RTK baselines and faster initialization.
- **AIM+** advanced Interference mitigation successfully protecting receivers against in-band continuous wave interference signals. A user selectable spectrum plot is available for interference signal identification.
- **ATrack+** patented Galileo AltBoc tracking.

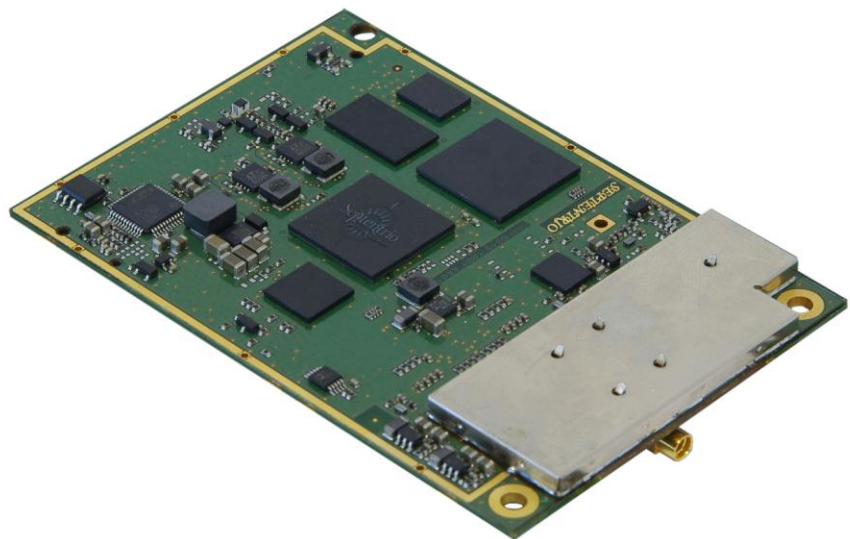

Easy to integrate

AsteRx3 is plug-in compatible with AsteRx2 and AsteRx2e making the upgrade from a dual-frequency to a multi-frequency application virtually effortless.

As all AsteRx receivers, AsteRx3 is available as OEM board, or integrated in a compact waterproof hardplastic housing (AsteRx3 HDC). Flexible configuration, a powerful command language, a variety of detailed output messages and formats suited for automation, serial, Ethernet and USB2.0 interfaces, all facilitate the work of the system integrator.

Command and control

As with all Septentrio GNSS receivers, an intuitive GUI - RxControl - can be used with

the AsteRx3 for its configuration, for logging and remote control. Moreover, RxControl includes a host of enhanced visualization features. RxControl is available both on Windows and Linux platforms, as well as on WindowsMobile for PDA platforms (RxMobile).



ASTERX3 TECHNICAL SPECIFICATIONS

FEATURES

- Multi-frequency L1/L2/L5/E5abAltBoc code/carrier tracking of GPS, GLONASS and GALILEO signals
- COMPASS ready
- 136 hardware channels for simultaneous tracking of all visible satellites in GPS GLONASS and GALILEO constellations
- Raw data output (code, carrier, navigation data)
- A Posteriori Multipath Estimator technique (APME)
- Moving Base support
- GNSS+ pack containing APME+, Lock+, RTK+, AIM+ and ATrack+
- Includes up to 3 SBAS channels (EGNOS, WAAS, other)
- 100 Hz measurements, SBAS, DGPS and SA PVT², 25Hz RTK (user selectable)
- x PPS output (x = 1, 2, 5, 10)
- 2 Event markers
- RAIM included
- Innovative and flexible power management under user control
- 4 hi-speed serial ports (OEM)
3 hi-speed serial ports (HDC)
- 1 Ethernet port
- 1 full speed USB port
- Plug compatible with AsteRx2 and AsteRx2e
- Highly compact and detailed Septentrio Binary Format (SBF) output
- NMEA v2.30 output format, up to 100 Hz
- RTCM v2.2, 2.3, 3.0 or 3.1
- CMR2.0 and CMR+
- Compact OEM board and IP65 housed solutions
- Includes intuitive GUI (RxControl) and detailed operating and installation manual

PERFORMANCE

Position accuracy ^{1,2,3,6}		
	Horizontal	Vertical
Standalone	1.3 m	1.9 m
SBAS	0.6 m	0.8 m
DGPS	0.5 m	0.9 m
RTK performance ^{1,14}		
Horizontal accuracy ³	0.6 cm + 0.5 ppm	
Vertical accuracy ³	1 cm + 1ppm	
Average time to fix ⁴	7 sec	
Velocity Accuracy ^{1,2,3}		
	Horizontal ³	Vertical ³
	0.8 cm/sec	1.3 cm/sec
Maximum Update rate		
Latency		100 Hz
		< 20 msec
Time accuracy ³		
1PPS	10 nsec	
Event accuracy	< 10 nsec	
Measurement precision ^{1,3,5}		
C/A pseudoranges	5 cm (GPS) ⁶	
	0.16 m (GPS) ^{7,8}	
	7 cm (GLONASS) ⁶	
	0.25 m (GLONASS) ^{7,9}	
E1 pseudoranges	8 cm (GALILEO) ^{7,8}	
L5/E5a	6 cm (GALILEO) ^{7,8}	
GPS P2pseudoranges ⁷	0.1 m	
GLONASS P pseudoranges ⁷	0.1 m	
L1 carrier phase	1 mm	
L2 carrier phase	1 mm	
L5/E5a carrier phase	1.3 mm	
L1/L2/L5 doppler	0.1 Hz	
Time to first fix		
Cold start ¹⁰	< 45 sec	
Warm start ¹¹	< 20 sec	
Re-acquisition	avg 1.2 sec	
Tracking performance (C/N₀ threshold) ^{12,13,15}		
Tracking	26 dB-Hz	
Acquisition	33 dB-Hz	
Acceleration ¹⁶	10 g	
Jerk ¹⁷	4g/sec	

- 1 Hz measurement rate
- 2 Performance depends on environmental conditions
- 3 1σ level
- 4 Baseline < 20 km
- 5 C/N₀ = 45 dB-Hz
- 6 Smoothed
- 7 Non-smoothed
- 8 Multipath mitigation disabled
- 9 Multipath mitigation enabled
- 10 No information available (no almanacs, no approximate position)
- 11 Ephemeris and approximate position known
- 12 95%
- 13 Max speed 600 m/sec
- 14 Fixed ambiguities
- 15 Depends on user settings of tracking loop parameters
- 16 During acquisition
- 17 During tracking

PHYSICAL AND ENVIRONMENTAL

OEM	
Size	60 x 90 mm
Weight	60 g
Input voltage	3-5.5 VDC
HDC	
size	130 x 185 x 46 mm
weight	510 g
Input voltage	9-30 VDC
Antenna LNA Power Output	
Output voltage	+ 5VDC
Maximum current	200 mA
Power consumption	
Operating temperature	2.9W typical
Storage temperature	-40 to +70 °C
	-40 to +85 °C
Humidity	
	5% to 95% (non condensing)
Connectors	
Antenna	TNC female
Power (HDC Housing)	ODU 5 pins female
COM1 (HDC Housing)	ODU 16 pins female
COM2 (HDC Housing)	ODU 16 pins female

OTHER SEPTENTRIO PRODUCTS

AsteRx1 - Compact single-frequency GNSS receiver platform, offering top-quality GPS and Galileo code and carrier phase data and single frequency positioning (including GPS DGPS and L1-RTK) at up to 50 Hz.

AsteRx2e - Compact dual-frequency GPS/GLONASS receiver platform, offering top-quality GPS code and carrier phase data and dual-frequency positioning (including DGPS and L1/L2-RTK) at up to 25 Hz.

AsteRx2eH - A unique single-board dual-frequency multi-antenna GPS/GLONASS receiver in a waterproof aluminum housing, that can be connected to 2 antennas for various machine control, heading and other multi-antenna applications.

AsteRxi - IMU assisted Compact Dual-frequency GNSS receiver platform, offering a 50Hz RTK position based on integrated IMU and GNSS measurements. In addition attitude information such as heading, pitch and roll are provided even in shadowed environments where conventional GNSS receivers fail.

PolaRx3e/3eG/3eTR - A family of versatile high-accuracy dual-frequency GNSS receivers for precise positioning and navigation applications. Next to high-quality GPS measurements, it provides GLONASS dual-frequency data as well as modernized GPS (L2C). PolaRx3eG provides access to the new and upcoming Galileo signals whereas PolaRx3eTR is a dedicated GPS/GLONASS/GALILEO Timing/Reference receiver.

PolaNt* - A lightweight precise positioning and survey single or dual-frequency GPS or GPS/GLONASS antenna for use with the PolaRx family.

PolaNt*_MC - A lightweight sturdy precise positioning and survey single or multi-frequency GPS or GPS/GLONASS L-band antenna for use with the AsteRx and PolaRx family.

RxControl - RxControl is an intuitive user interface to configure and control all types of PolaRx receivers and monitor, log and post data remotely.

RxMobile - A unique intuitive, portable GUI field controller for the Septentrio receivers. RxMobile allows controlling the receiver, monitoring the navigation solution and accessing its functions in the field in the same intuitive way as with RxControl.



AsteRx3 OEM

Integrator Kit



AsteRx3 HDC



Specifications subject to change without notice. Certain features and specifications may not apply to all models.

© 2010 Septentrio Satellite Navigation. All rights reserved.

SSNDS 03/2010/19

Although believed to be accurate and reliable, Septentrio reserves the right to alter the above specifications without prior notice. However, no responsibility is assumed by Septentrio for its use, nor for any infringements of patents or other rights of third parties resulting from its use.