



GPS
NETWORKING

MIL-HIALDCBS1X8

Military High Isolated Amplified '3Z8' GPS Urnavigt Technical Product Data



Features

- **Extremely Flat Group Delay**
Less than 1ns variation
- **Excellent Gain Flatness**
 $|J1 - J8| < 1.0\text{dB}$
- **Military Qualified 1X8 Splitter**
MIL STD 810F, MIL STD 704, MIL STD 1275B
- **Amplifier Gain 4dB typical**
- **Passes all GNSS Frequencies (Entire L-band)**
- **DC Blocked Outputs Feature 200Ω Loads**
Prevent antenna alarm faults from connected devices
- **Phase Matched Outputs**
Phase (J1 – J8) < 1.0°
- **Special Configurations Available By Request**
- **Qual Test Summary Certification Available**

Description

The MIL-HIALDCBS1X8 GPS Splitter (GNSS Splitter) is a one input, eight output high isolated amplified splitter based on the Wilkinson splitter design. The frequency response covers the entire L-band (all GNSS Frequencies) with excellent gain flatness. All Mil Spec splitters passed rigorous MIL-STD 810F testing detailed in the separate Qual Test Summary Certification. The MIL-HIALDCBS1X8 is standard hermetically sealed, EMI Shielded, Weatherproofed and configured with MIL-STD-704 or MIL-STD 1275B compliant power options. Each DC blocked output is loaded with a 200Ω resistor to simulate the antenna current draw to prevent false antenna alarm faults. Contact GPS Networking Technical Support for any questions regarding standard configurations or special configurations at salestech@gpsnetworking.com or 1-800-463-3063.



Contact NavtechGPS for product details. www.NavtechGPS.com
+1-703-256-8900 • 800-628-0885 • info@navtechgps.com

Electrical Specifications, $T_A = 25^{\circ}\text{C}$

Parameter	Conditions	Min	Typ	Max	Units
Freq. Range	Ant – J1, J2, J3, J4, J5, J6, J7, J8 - 50Ω	1.1		1.7	GHz
In/Out Imped.	Ant, J1, - J2		50		Ω
Gain	Ant – J1, J2, J3, J4, J5, J6, J7, J8 - 50Ω	3.0	4.0	5.5	dB
Input SWR	All ports - 50Ω			2.0:1	-
Output SWR	All ports - 50Ω			1.5:1	-
Noise Figure	Ant – J1 - J8, – 50Ω		3.7	3.9	dB
Gain Flatness	L1 – L2 ; Ant – J1 - J8, - 50Ω		1.0	2.0	dB
Amplitude Balance	J1 – J8 ; Ant – J1, J2, J3, J4, J5, J6, J7, J8 - 50Ω			0.5	dB
Phase Balance	Phase (J1 – J8) ; Ant – J1, J2, J3, J4, J5, J6, J7, J8 - 50Ω			1.0	deg
Isolation	J1 – J8, Ant - 50Ω	35	40	45	dB
Group delay Flatness	$\tau_{d,max} - \tau_{d,min}$: Ant – J1, J2, J3, J4, J5, J6, J7, J8 - 50Ω			1	ns
Req. DC Input V.	Non-Network Configuration, DC Input on J1	3.6		15	Vdc
P1 dB	Output Power @ 1dB Gain Compression (f = 1.5GHz)		-28		dBm
Current Draw (5v) ⁽¹⁾	Amplifier Current Draw, All ports - 50Ω			15	mA

(1). Current draw on input DC port in the non-networked configuration.


Available Power Options (Networked Option)

External Power Options (Networked Option)		
Source Voltage Options	VOLTAGE INPUT	STYLE
	110VAC	Transformer (Wall Mount)
	220 VAC	Transformer (Wall Mount)
	240 VAC (United Kingdom)	Transformer (Wall Mount)
	Customer Supplied DC 9-32 VDC	Mil DC Connector (includes Mate Std)
Output Voltage Options ⁽¹⁾	DC VOLTAGE OUT	MAX CURRENT OUT FOR CORRESPONDING V_{out} ⁽²⁾
	3.3 V	110mA
	5V	130mA
	9V	140mA
	12V	170mA
	15V	210mA
	Custom	TDB
Standard DC Configuration without External Power Option		
	J1/Output 1 Pass DC, J2, J3, J4, J5, J6, J7, J8 Block DC, Input Pass DC	
Standard DC Configuration with any External Power Option (AC/DC or Military DC)		
	All DC Blocked Outputs include 200Ω Load Standard	
	Any port can be custom selected to Pass or Block DC	
RF Connector Options		
Connector Options	CONNECTOR STYLE	CHARGE
	Type N-female	NC
	Type SMA-female	NC
	Type TNC-female	NC
	Type BNC-female	NC
	Other	Contact GPS Networking

(1) With Networked Option, any RF port (input or output) can be selected Pass DC or Block DC.

(Contact GPS Networking Technical Support at 719-595-9880 or salestech@gpsnetworking.com for any questions regarding non-standard configurations and corresponding part numbers)

Part Number Configuration

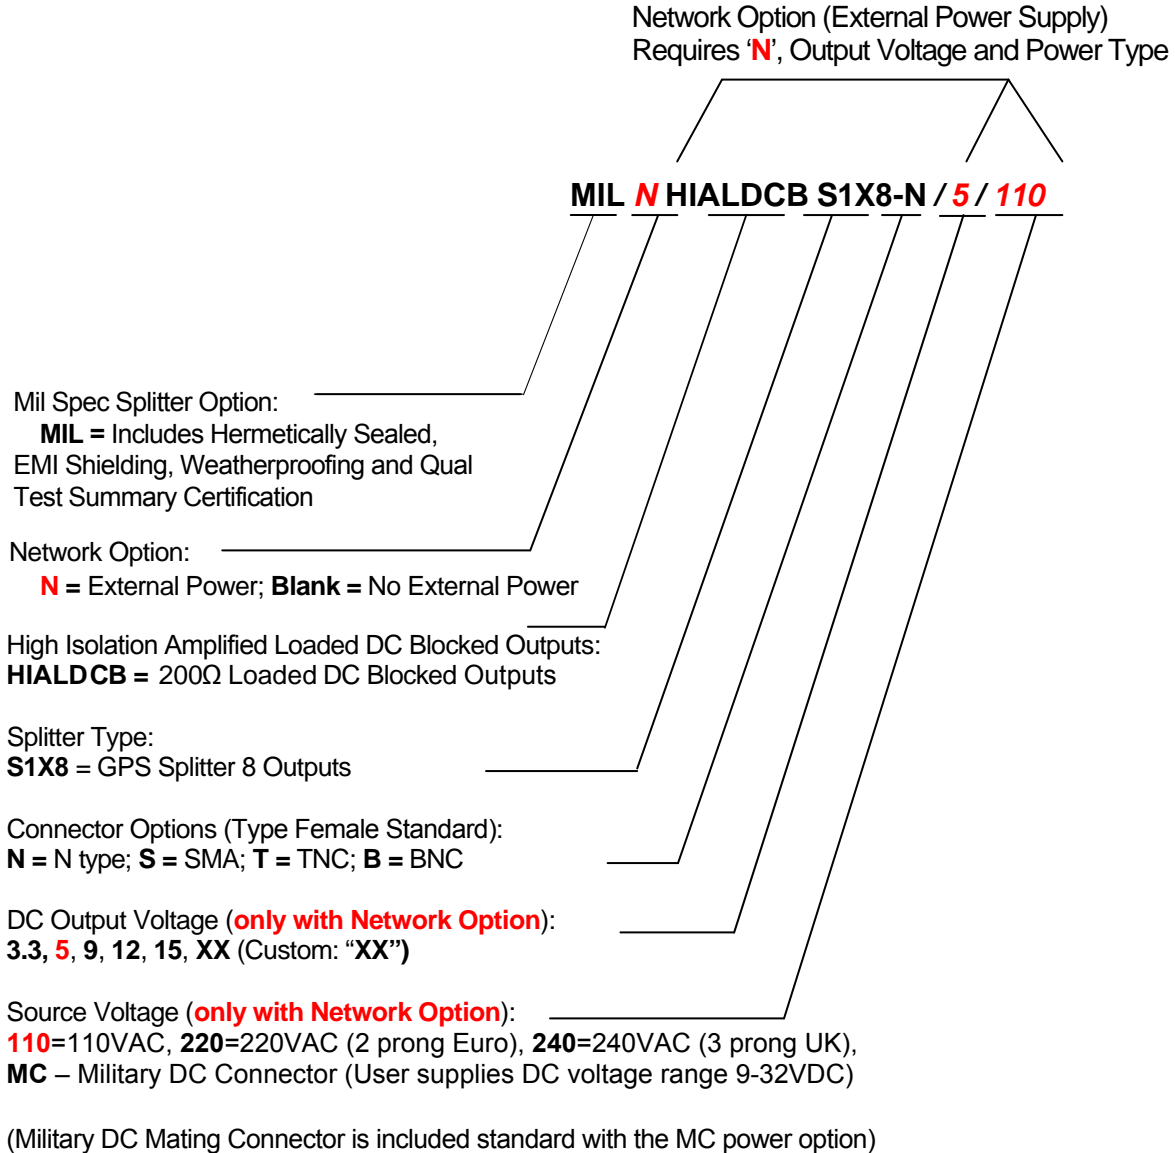


When no external power supply option (AC or DC) is selected, Output 1/J1 is Pass DC standard. Whenever an external power supply option is selected, all outputs are DC blocked standard.

(Contact GPS Networking Technical Support at 719-595-9880 or salestech@gpsnetworking.com for any questions regarding non-standard configurations and corresponding part numbers)

Performance


MIL-HIALDCBS1X8 (High Isolation Typical Gain)

Input SWR (Ant. port) and Frequency Response: Ant. To J1 - J8, (Typical Type N connectors)

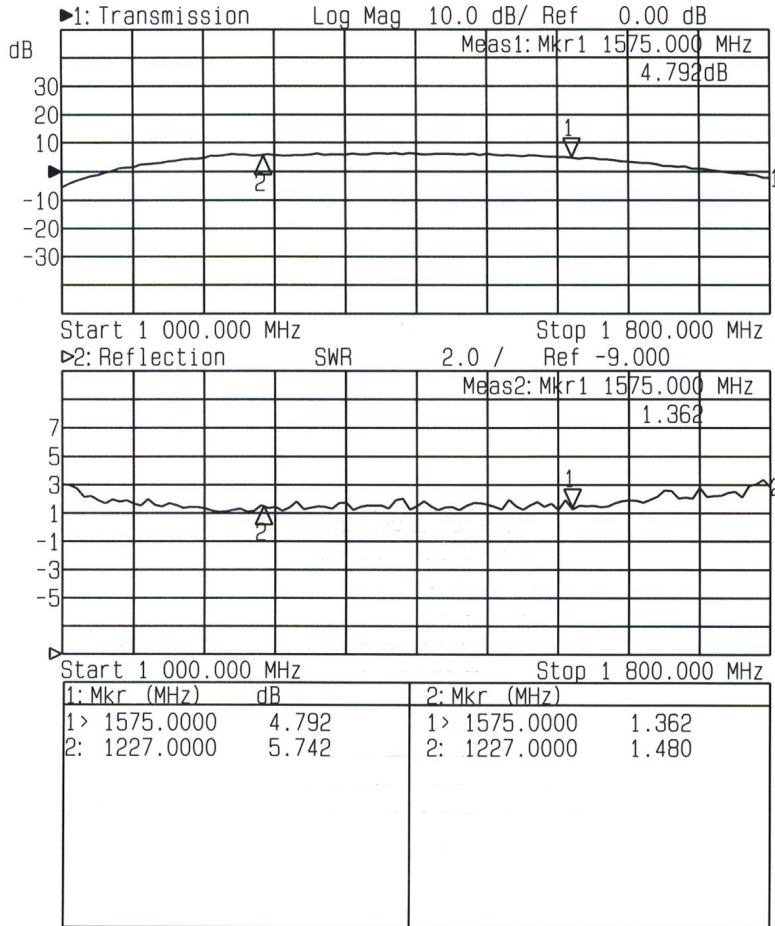

MIL-HIALDCBS1X8 (High Isolation Option):

Output Isolation (J1-J3, J2-J4 etc) and Output SWR (Typical, type N connector):

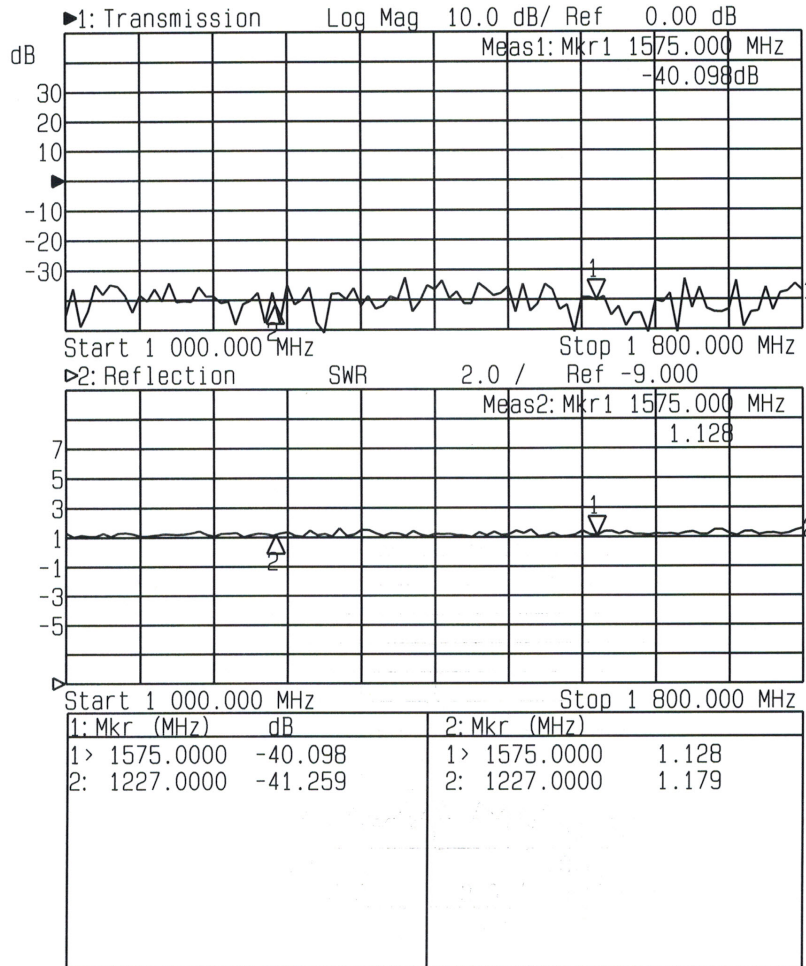

Mechanical

Dimensions: Height: 1.3"
Length (not including connectors) Body: 4.5"
Base Plate: 5.25"

Width (not including connectors): 2.5"

Weight: 15 oz. (430 grams)

Operating Temp. Range: -40° to + 75°C

Finish Housing and Base Plate: ELECTROLESS NICKEL PLATED
MIL-C-26074C CLASS 1, .0001-.0003 MAX

Finish Lid: ANODIZE, TYPE II, CLASS 2, BLACK, per MIL-A-8625

