

NovAtel's family of Global Navigation Satellite System (GNSS) receivers sets the standard in positioning performance, features and ease of integration.

We begin with a flexible, customer-focused approach to ensure you choose the OEM precision receiver best suited to your application.

Our products are designed to provide unsurpassed positioning performance and to optimize your investment. A standardized platform, multi-constellation tracking and user-configurable and upgradable firmware means the NovAtel products you choose today will meet your needs well into the future.

Feature rich, our GNSS cards deliver signal modernization, Pulse Aperture Correlation (PAC) multipath mitigation, and integrated L-Band. Innovative firmware such as ALIGN® heading, GLIDE™ smoothing and NovAtel CORRECT™ positioning will keep you in the lead. An Application Programming Interface (API) and a common user interface are standard.

For comprehensive receiver information, visit www.novatel.com/receivers

The secret to positioning success.

NovAtel designs, manufactures and sells high precision OEM GNSS positioning technology.

Developed for efficient and rapid integration, our GNSS products have set the standard in quality and performance for over 20 years. State-of-the-art, lean manufacturing facilities in our North American headquarters produce the industry's most extensive line of OEM receivers, antennas and subsystems. All of our products are backed by a team of highly skilled customer support and design engineers, ready to answer all your integration questions. For unsurpassed quality, product selection and precise engineering know-how, choose NovAtel.

For more information contact



Your ONE Source for GNSS Products and Solutions

+1-703-256-8900 or 800-628-0885
info@NavtechGPS.com
www.NavtechGPS.com



Version 15 Specifications subject to change without notice.

© 2014 NovAtel Inc. All rights reserved.

NovAtel, OEM6, OEMStar, RT-2, ALIGN and ProPak are registered trademarks of NovAtel Inc.

OEM615, OEM617D, OEM628, OEM638, ProPak6, FlexPak6, FlexPak-G2, GLIDE and NovAtel CORRECT are trademarks of NovAtel Inc.

Refer to www.novatel.com for specification revisions.

Printed in Canada

D09736 May 2014




Receivers

NovAtel GNSS Receivers

OEM6® Series

Powerful, next generation receiver family tracks existing and upcoming GPS, GLONASS, Galileo and BeiDou signals, making this series future proof. Incorporating NovAtel's industry standard common platform, the OEM6 series is designed for product quality and ease of integration. Available in four configurations:



OEM615™

Smaller than the size of a business card, the OEM615 features high performance GNSS positioning with low power consumption.

Size: 46 × 71 × 11 mm Weight: <24 g

GPS + GLONASS + Galileo + BeiDou + SBAS



OEM617D™

Compact, dual-antenna, dual-frequency GNSS receiver delivers robust RTK functionality and ALIGN heading capability on a single receiver card.

Size: 46 × 71 × 11 mm Weight: <24 g

GPS + GLONASS + Galileo + BeiDou + SBAS




OEM628™

Features 100 Hz data rate for high dynamic positioning applications. Form factor and interface compatible replacement for NovAtel's OEMV-2 GNSS receiver.

Size: 60 × 100 × 9 mm Weight: 37 g

GPS + GLONASS + Galileo + BeiDou + SBAS + L-Band

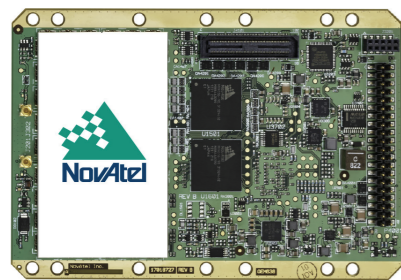

OEM638™

The most advanced GNSS receiver within NovAtel's OEM6 series of products. The fully featured OEM638 provides 240 channels, comprehensive tracking and positioning with all current and planned GNSS signals, robust interference rejection, a powerful API, 4 GB onboard data storage, wide input voltage range and a host of interface options.

Form factor and interface compatible replacement for NovAtel's OEMV-3 GNSS receiver.

Size: 85 × 125 × 14.3 mm Weight: 84 g

GPS + GLONASS + Galileo + BeiDou + SBAS + L-Band

OEMStar®



OEMStar®

NovAtel's lowest cost, high performance L1 GNSS receiver. Easy to integrate, the OEMStar® offers superior carrier phase tracking and positioning performance and is our lowest power consumption precision receiver.

Size: 46 × 71 × 13 mm Weight: 18 g

GPS + GLONASS + SBAS

POSITIONING ACCURACY (LEVEL)

Metre (RMS)		Sub Metre (RMS)		NovAtel CORRECT™		
Single Point L1	Single Point L1/L2	SBAS	DGPS	TERRASTAR-D ^a	Veripos Apex ^{2b}	RT-2®
1.5 m	1.2 m	0.6 m	0.4 m			1 cm + 1 ppm
1.5 m	1.2 m	0.6 m	0.4 m			1 cm + 1 ppm
1.5 m	1.2 m	0.6 m	0.4 m	6 cm	6 cm	1 cm + 1 ppm
1.5 m	1.2 m	0.6 m	0.4 m	6 cm	6 cm	1 cm + 1 ppm
1.5 m	0.7 m	0.5 m				

OPTIONS

ALIGN® Heading and Relative Positioning	Integrated ALIGN Heading	GLIDE™	RAIM	SPAN®
+		+	+	+
+	+	+	+	
+		+	+	+
		+	+	

SIGNAL TRACKING

GPS	GLONASS	Galileo	BeiDou	SBAS	L-Band	QZSS	Number of Channels
L1, L2, L2C	L1, L2, L2C	E1	B1	+		+	120
L1, L2, L2C	L1, L2	E1	B1, B2	+		+	120
L1, L2, L2C, L5	L1, L2, L2C	E1, E5a, E5b, AltBOC	B1, B2	+	+	+	120
L1, L2, L2C, L5	L1, L2, L2C	E1, E5a, E5b, AltBOC	B1, B2	+	+	+	240
L1	L1			+			14

INTERFACES

Serial Ports	USB Ports	CAN Ports	Ethernet	Memory	Maximum Data Rate	Input Voltage	Power Consumption	Enclosure Option
3	1	2			50 Hz	+3.3 VDC [±5%]	< 1.0 W	
3	1	2			20 Hz	+3.3 VDC [±5%]	1.9 W	
3	1	2	1		100 Hz	+3.3 VDC [±5%]	1.3 W	FlexPak6™
6	1 Device, 2 Host	2	1	4 GB onboard	100 Hz	4.5 - 36 VDC, +3.3 VDC [+5%/-3%]	2.8 W	ProPak6™
2	1				10 Hz	+3.3 to +5.0 VDC [±5%]	0.36 W	FlexPak-G2™

a. TERRASTAR-D subscriptions are available from NovAtel.
b. Veripos Apex2 marine subscriptions are available directly from Veripos. (www.veripos.com)